

IAP20 Rec'd OFSTW-TO 30 JAN 2006

AN ACTIVE FILTER

D e s c r i p t i o n

5 The present invention relates to an active filter and, more particularly, to techniques adapted to compensate for the parasitic poles generated by the amplifiers used in the filter itself.

10 It is known that in carrying out circuit analyses, mathematical models are used to describe the behaviour of the different electronic components and to calculate magnitudes of interest relating to the circuit under examination, through suitable algorithms and functions.

15

A typical example of the mathematical models used is represented by the so-called transfer function describing exactly in a functional manner, the relationship existing between a signal placed at a
20 given-stage input and the corresponding signal read at the output.

Obviously, the mathematical models used are not able to exactly describe the circuit reality to which they
25 refer; they only constitute approximate descriptions

and the accuracy of each model is directly connected with the precision it is wished as regards the obtained results. Therefore, the greater the precision and accuracy required for the results must be, the greater
5 the accuracy and complexity of the utilised model.

Generally the differences existing between the "real" behaviour of an electronic component and the "ideal" model used for mathematical simulations relating to
10 such a component are called "non-idealities".

In the specific sector concerning active filters, in particular of the resonant type, the most important non-idealities are caused by the so-called parasitic poles of the active stages composing the filter itself.
15

A first solution proposed by the known art to compensate for the effects of the parasitic poles is diagrammatically shown in Fig. 1a: the resistor R_f is introduced in series with the feedback capacitor of an
20 inverting integrator, by means of which the operational amplifier rectifies its answer.

A second compensating technique is diagrammatically shown in Fig. 1b. This circuit diagram refers to an
25 active filter made up of three stages, each of them

obtained with a suitably feedbacked operational amplifier; in particular, the opamp of the input stage is feedbacked through a parallel of a capacitor and a resistor whereas the opamp of the intermediate stage is
5 disposed in a typical inverting configuration; the operational amplifier of the third stage is feedbacked through a capacitor so as to form a conventional inverting integrator stage. The additional connection, made for compensation purposes is denoted by letter
10 "X"; this connection generally aims at eliminating the parasitic effects due to one of the active elements therein preset and, more particularly, at limiting the dependence of the filter behaviour on the thermal drifts of its components; in fact, as known, each
15 electronic component varies its behaviour depending on the temperature at which it is. In this way, the quality factor "Q" of the third stage is enhanced making said stage more precise in the neighbourhood of its operating frequency, which leads the filter to have
20 a degree of selectivity "Q" that is closer to the wished degree during the design or planning step.

However, this quality factor "Q" keeps in any case rather low; for the particular configuration
25 illustrated, to low frequencies it is of:

$$Q = \frac{1}{2 \left(\frac{1}{|A|^2} + \frac{1}{A_o} \right)}$$

wherein $|A|$ and A_o are the open-loop dynamic gain and static gain respectively, of a general operational
5 amplifier and correspondingly the filter is in any case not fully performing.

A drawback in the solutions briefly described above refers to the fact that these techniques are able to
10 compensate for the non-idealities introduced by a single active stage without being able to efficiently operate on possible upstream-connected stages.

In other words, using the above mentioned known
15 solutions, it is exclusively possible to compensate for the parasitic effects referable to only one singularity, without on the contrary being able to affect the non-idealities due to possible other parasitic poles.

20

It is therefore apparent that the obtained compensation is not satisfactory and does not allow the real filter behaviour to approach the ideal behaviour of said filter in an important manner.

25

A third known solution is shown in Fig. 1c in which a conventional biquadratic three-stage filter has been modified in such a manner that the first opamp output A1 is brought to the noninverting input of the second opamp A2, by means of resistor R, and the output of the third opamp A3 is brought to the noninverting input of the second opamp, by means of capacitor C; the inverting input of the second opamp on the contrary is grounded.

10

This circuit solution, unlike the two solutions previously shown, allows the effects of the parasitic poles of three stages composing a typical resonant active filter to be compensated for. However, in this case too, the obtainable results are of poor quality because in any case they do not enable operation with very high "Q" values, above all for relatively high frequencies. In addition, as a consequence of each known compensation technique, the opamp the circuit structure of which is modified for compensation purposes, in the last-mentioned case the second opamp A2, is frequency-destabilized; this means that for frequencies much higher than the work frequency " f_0 " of the filter, said filter can become unstable and output

20

a signal of an amplitude comparable with that of the useful signal, which is clearly unacceptable.

~~The present invention aims at providing an active~~
5 ~~filter the "real" behaviour of which is very similar to~~
~~the "ideal" behaviour.~~

~~Another~~An aim of the present invention is to make available an active filter in which the non-ideal
10 effects due to the parasitic poles introduced by the amplification stages utilised are compensated for.

It is a further aim of the present invention to provide an active filter in which the effects of a plurality of
15 parasitic poles due to one or more amplification stages connected with each other in cascade or in parallel are compensated for.

Another aim of the present invention is to make
20 available an efficient and functional active filter, characterised by a great simplicity from the point of view of circuit implementation and by a remarkable inexpensiveness in terms of manufacturing costs.

A still further aim of the invention is to provide an active filter in which the operational amplifiers are not destabilized at high frequency, due to the compensation itself.

5

~~The foregoing and further aims are substantially achieved by an active filter in accordance with that which is set out in the appended claims.~~

10 Further features and advantages will become more apparent from the detailed description of a preferred but not limiting embodiment of an active filter, shown in the accompanying drawings, in which:

- Figs. 1a, 1b and 1c show the circuit diagram of
15 compensated active filters in accordance with the known art;

- Figs. ~~2-15, 16-78~~29 and ~~81~~32 show several different embodiments of the active filter in accordance with the present invention;

20 - Figs. ~~15a, 73-76~~30-31, 33-37 and ~~79-80~~37a-37b show some circuit stages that can be used in the filter in accordance with the invention.

The active filter in accordance with the present invention is identified with reference numeral 1 in the accompanying figures.

The present invention relates to a multi-function
5 active filter of the second order, substantially comprising a first stage 10 set to receive an input signal V_s , through a resistor 12, a second stage 20 and a third stage 30, connected with each other in cascade and provided with a first, a second and a third
10 operational amplifiers 11, 21 and 31 respectively, each of which has an inverting input 11a, 21a, 31a, a noninverting input 11b, 21b, 31b and an output 11c, 21c, 31c.

15 Each output 11c, 21c, 31c is connected to the inverting input 11a, 21a, 31a of the same opamp through feedback means 13, 23, 33 defining respective negative-feedback branches 15, 25, 35.

Preferably, a resistor 22 is provided between the
20 output 11c of the first opamp 11 and the inverting input 21a of the second opamp, and a resistor 32 is provided between the output 21c of the second opamp 21 and the inverting input 31a of the third opamp 31.

For sake of clarity, in the present description and in
25 the following claims, the wording "element X connected

between nodes A and node B" is intended to mean that the element X has an end connected to node A and another end connected to node B.

A main feedback branch 50, preferably defined by a resistor 51 has a first end 50a connected to the output 31c of the third opamp 31, and a second end 50b connected with the inverting input 11a of the first opamp 11.

10 In its main embodiment, filter 1 can further comprises a first connecting branch having a first end connected with the inverting input 11a, 21a, 31a of a predetermined one of the first, second and third operational amplifiers 11, 21 and 31, and a second end
15 connected with at least one of the noninverting inputs of operational amplifiers different from the predetermined operational amplifier.

The noninverting input of the predetermined operational
20 amplifier is connected to the ground either directly or through a resistor.

Filter 1 can further comprise a second connecting branch; the second connecting branch has a first end
25 connected to the inverting input 11a, 21a, 31a of one

of said first, second and third operational amplifiers
11, 21 and 31 and a second end connected with the
noninverting input of another operational amplifier,
different from the predetermined opamp (i.e. from the
5 opamp to which the first end of the first connecting
branch is connected).

Each connecting branch is defined by a direct
connection or a respective fourth stage 40 comprising a
10 fourth operational amplifier 41 having an inverting
input 41a, a noninverting input 41b and an output 41c
defining the second end of the corresponding connecting
branch, whereas the noninverting input 41b defines the
first end of the same connecting branch.

15

The output 41c is also connected with the inverting
input 41a through a resistor 43. The fourth stage 40
further comprises a resistor 42 having a first end 42a
connected with the inverting input 41a and a second end
20 42b connected to the ground.

Each fourth stage 40 is therefore in the form of a
noninverting amplifier.

The embodiments briefly described above are represented in Figs. 2-6, 11, 13, 13a, 14, 14a, 15, 18, 19, 20, 21, 29, 30, 31, 43, 44, 47, 61-6322, 23 and 7924.

5 In one particular case (Fig. 8132) the two second ends of the first and second connecting branches are connected with the noninverting input of the same opamp (11, 21, 31) and the first end of the second connecting branch is connected with the inverting input of an
10 opamp different than the predetermined operational amplifier 11, 21, 31; in other words the first and second connecting branches have their second ends in common (connected with the noninverting input of the same opamp), whereas the two first ends are connected
15 with operational amplifiers distinct from each other.

Each of the two connecting branches is defined by a respective fourth stage 40 that is preferably defined by a general voltage amplifier, having an input ("in")
20 defining the first end of the respective connecting branch, and an output ("out") connected with the first end of a resistor; the second end of said resistor defines the second end of such a branch.

It is provided for the fourth stage 40 to be also in the form of a differential amplifier, instead of being in the form of a noninverting amplifier; this differential amplifier can be obtained through the
5 following circuit structures:

1. The noninverting input 41b of the fourth opamp is connected, through a resistive divider, with the first end of the first connecting branch and to the ground;
10 the first end of the first connecting branch is also connected with the inverting input 11a of the first operational amplifier 11. The second end 42b of the resistor 42 is connected with the noninverting input 11b of the first operational amplifier 11. Filter 1 is
15 further provided with the second connecting branch having a first end connected with the inverting input 21a of the second operational amplifier 21 and a second end connected with the noninverting input 31b of the third operational amplifier 31 (Figs. 49 and 50).

20

2. The first end of the first connecting branch is connected with the inverting input 11a of the first opamp 11, whereas the second end of the first connecting branch (defined by the output 41c of the
25 fourth operational amplifier) is connected with the

noninverting input 31b of the third operational
amplifier 31; alternatively, the first end of the first
connecting branch is connected with the inverting input
31a of the third opamp 31, whereas the second end of
5 this branch is connected with the noninverting input
11b of the first opamp 11. In any case, the
noninverting input 41b of the fourth opamp is
connected, through a resistive divider, with the first
end of the first connecting branch and the inverting
10 input 21a of the second opamp. In addition, the second
end 42b of the resistor 42 is connected either with the
noninverting input 11b of the first opamp 11 or with
the ground; it will be appreciated that the second
connecting branch can be also not used in this
15 configuration (Figs. 77, 78 and 51).

3. The noninverting input 41b of the fourth opamp 40 is
directly connected with the first end of the first
connecting branch, and this end is connected with the
20 inverting input 11a of the first operational amplifier
11. The second end 42b of the resistor 42 is connected
to the ground; the fourth stage 40 is also provided
with a resistor 46 having a first end 46a connected
with the output 21c of the second operational amplifier
25 21 and a second end 46b connected with the inverting

~~input 41a of the fourth operational amplifier 41 either
directly or through a resistor. In this case the filter
in accordance with the invention is further preferably
provided with the second connecting branch having the
5 first end connected with the inverting input 21a of the
second operational amplifier 21 and the second end
connected with the noninverting input 31b of the third
operational amplifier 31 (Figs. 45 and 46).~~

10 In a first set of alternative embodiments, filter 1 is
not provided with the second connecting branch while it
preferably comprises the first connecting branch that
is defined by a direct connection. The fourth stage 40
is in particular in the form of an inverting amplifier
15 the input of which is connected with the output 11c,
21c, 31c of one of said operational amplifiers 11, 21
and 31. More particularly, the inverting input 41a of
the fourth operational amplifier 41 is directly
connected with the noninverting input 11b, 21b, 31b of
20 a predetermined one of the first, second and third
operational amplifiers 11, 21 and 31, whereas the
noninverting input 41b of the fourth operational
amplifier 41 is directly connected with the inverting
input of one of said opamp 11, 21 and 31, different
25 from the opamp with which the inverting input 41a is

connected (identified above as the predetermined operational amplifier).

Alternatively, the noninverting input 41b is directly
5 connected with a fixed-potential node, preferably a grounded node (Figs. 7-1311, 12, ~~16-20~~, ~~22-28~~, ~~32-42~~, 17, 21 and ~~48~~23).

In a second set of alternative embodiments ~~filter 1 is~~
10 ~~not provided with the above mentioned first and second connecting branches.~~

~~Filter 1 in any case comprises a fourth stage 40 provided with a fourth operational amplifier 41 having~~
15 ~~an inverting input 41a, a noninverting input 41b, and an output 41c; this operational amplifier 41 is in the form of a differential amplifier alternatively interposed in circuit between the output 11c of the first opamp 11 and the second stage 20, between the~~
20 ~~output 21c of the second opamp 21 and the third stage 30, or between the output 31c of the third opamp 31 and the first end 50a of the main feedback branch 50.~~

~~The inverting input and noninverting input of the~~
25 ~~differential amplifier are connected with respective~~

~~outputs of said operational amplifiers 11, 21, 31~~
~~(Figs. 52-60).~~

~~In a third set of alternative embodiments, filter 1 is~~
5 ~~provided with at least the first connecting branch. At~~
~~least one predetermined opamp of the mentioned~~
~~operational amplifiers 11, 21 and 31 in its negative-~~
~~feedback branch 15, 25, 35 comprises a respective~~
10 ~~fourth stage 40 provided with a fourth operational~~
~~amplifier 41 having an inverting input 41a, a~~
~~noninverting input 41b and an output 41c. The fourth~~
~~operational amplifier 41 is in the form of a buffer or~~
~~a phase shifter, and its noninverting input 41b is~~
~~connected with the output 11c, 21c, 31c of said~~
15 ~~predetermined operational amplifier 11, 21, 31, either~~
~~directly or through a resistor; the inverting input of~~
~~the predetermined opamp is connected with the output~~
~~41c of the fourth opamp 41, through respective feedback~~
~~means 13, 23, 33 (Figs. 64-72 and 80-82).~~

20

~~According to the embodiment adopted in this specific~~
~~embodiment taken into consideration, filter 1 can further~~
comprise one or two of the following resistors:

- a main resistor 60 having a first end 60a connected
25 with the inverting input 11a of the first operational

amplifier 11, and a second end 60b connected with a fixed-potential node, preferably a grounded node;

- a secondary resistor 62 having a first end 62a connected with the inverting input 21a of the second operational amplifier 21, and a second end 62b connected with a fixed-potential node, preferably a grounded node;
- an auxiliary resistor 61 having a first end 61a connected with the inverting input 31a of the third operational amplifier 31, and a second end 61b connected with a fixed-potential node, in particular a grounded node.

It is to be pointed out that in the diagrams of the accompanying figures different switches are present; these switches are not to be intended as physically present within the circuit, but their task is only to indicate possible different configurations that can be taken by the same circuit, depending on the operating condition thereof. By way of non-limiting example, in the following specification, in addition to the switches introducing essential components, and depending on the circumstances, also the switches relating to a component or a circuit solution that does not change the filter nature to an important degree

have been arbitrarily considered as closed, irrespective of the typical configuration that the filter can take in the specific case under examination; all cases are duly contemplated in the appended claims.

5

In more detail, in the circuits in Figs. 2-6, the feedback means 12 of the first opamp 11 is ~~feedbacked~~defined by a single capacitor or a branch defined by a capacitor and a resistor connected in series with each other, whereas the second opamp 21 is feedbacked by means of a resistor 23. The third opamp 31 is feedbacked by means of a single capacitor, or by means of a branch defined by a capacitor connected in series with a resistor; it ~~is~~can be also provided for
10 this branch to be connected in parallel with another branch comprising a single capacitor or a capacitor connected in series with a resistor.
15

~~In addition~~Preferably, a feedback resistor 74 has a
20 first end 74a connected with the inverting input 11a of the first opamp 11 and a second end 74b that can be connected either to the output 11c of the first opamp 11 or to the output 21c of the second opamp 21.

In the diagrams in Figs. 2, 3, 5 and 6 a main resistor 60 is connected between the inverting input 11a of the first opamp 11 and the fixed-potential node, preferably a grounded node, ~~in~~. In the diagrams in Figs. 4 and 5, 5 an auxiliary resistor 61 is connected between the inverting input 31a of the third opamp and a fixed-potential node, preferably a grounded node.

The circuit in Fig. 2 further has a direct connection 10 70 between the noninverting input 11b of the first opamp 11 and the inverting input 21a of the second opamp 21; the inverting input 31 of the third opamp 31 and the noninverting input 21b of the second opamp 21 are connected with each other by a feedback branch 71 15 that can be made either as a direct connection or as an amplifier. The noninverting input 31b of the third opamp 31 is connected to the ground. In relation to the input signal V_s , the output 11c of the first opamp 11 is an output of the band-pass type, which is -180° out 20 of phase, the output 21c of the second opamp 21 is an output of the band-pass type not out of phase and the output 31c of the third opamp 31 is a 90° out of phase low-pass output.

The circuit in Fig. 3 shows a direct connection 72 25 between the noninverting input 11b of the first opamp

11 and the inverting input 31a of the third opamp 31;
also provided is a direct connection 71 between the
noninverting input 21b of the second opamp 21 and the
inverting input 31a of the third opamp 31. The
5 noninverting input 31b of the third opamp 31 is
connected to the ground.

The circuit in Fig. 4 shows a direct connection 70
between the noninverting input 11b of the first opamp
10 11 and the inverting input 21a of the second opamp 21,
together with a direct connection 76 between the
inverting input 21a of the second opamp 21 and the
noninverting input 31b of the third opamp 31. The
noninverting input 21b of the second opamp 21 is
15 connected to the ground.

The circuit in Fig. 5 has a direct connection 72
between the noninverting input 11b of the first opamp 11
and the inverting input 31a of the third opamp 31
20 together with a direct connection 76 between the
noninverting input 31b of the third opamp 31 and the
inverting input 21a of the second opamp 21. The
noninverting input 21b of the second opamp 21 is
connected to the ground.

The circuit in Fig. 6 shows a direct connection 73 between the inverting input 11a of the first opamp 11 and the noninverting input 21b of the second opamp 21, together with a direct connection 72 between the
5 noninverting input 11b of the first opamp 11 and the inverting input 31a of the third opamp 31. The noninverting input 31b of the third opamp 31 is connected to the ground.

With reference to Figs. 3-6, if resistors 600 and 601
10 are used, in relation to the input signal V_s the output 11c of the first opamp 11 is an output of the band-pass type which is -180° out of phase, the output 21c of the second opamp 21 is an output of the band-pass type not out of phase, and the output 31c of the third opamp 31
15 is a 90° out of phase low-pass output; if resistors 600 and 601 are used, the output 11c of the first opamp 11 is a -180° out of phase band-pass output, the output 21c of the second opamp 21 is a notch output, in which the frequencies other than the one to be eliminated are
20 180° out of phase, and the output 31c of the third opamp 31 is a 90° out of phase low-pass output.

~~Figs. Fig. 12 and 13 show~~ shows a further embodiments of filter 1. In this circuits, the first opamp 11 is
25 feedbacked by a single capacitor or by a branch defined

by a capacitor and a resistor connected in series with each other, whereas the second opamp 21 is feedbacked by means of a resistor 23.

5 The third opamp 31 is feedbacked by means of a single capacitor, or by means of a branch defined by a capacitor connected in series with a resistor; it is also provided that this branch can be connected in parallel with another branch defined by a single
10 capacitor or a capacitor connected in series with a resistor.

In addition, a feedback resistor 74 has a first end 74a connected with the inverting input 11a of the first
15 opamp 11 and a second end 74b that can be connected to the output 11c of the first opamp 11 or to the output 21c of the second opamp 21.

The filter 1 shown in Figs. 12 and ~~13~~ further comprises
20 a fourth stage 40 provided with a fourth operational amplifier 41 having an inverting input 41a, a noninverting input 41b and an output 41c; a first resistor 42 is connected between the inverting input 41a of the fourth opamp 41 and the output 31c of the
25 third opamp 31, whereas a second resistor 43 is

connected between the inverting input 41a and the output 41c of the fourth opamp 41.

~~In both diagrams~~ In the diagram provision is also made
5 for an auxiliary resistor 61 to be connected between
the inverting input 31a of the third opamp 31 and a
fixed-potential node, preferably a grounded node, ~~in.~~
The noninverting input 41b of the fourth opamp 41 is
directly connected to the inverting input 21a of the
10 second opamp 21 and a direct connection 77 is
interposed between the noninverting input 11b of the
first opamp 11 and the inverting input 31a of the third
opamp 31.

With reference to Fig. 12, ~~in addition, a secondary~~
15 ~~resistor 62 connected between the inverting input 21a~~
~~of the second opamp 21 and a fixed potential node,~~
~~preferably grounded, can be introduced.~~

~~In the diagram in Fig. 12 two possible configurations~~
20 ~~are provided, the first one being denoted by position~~
~~"A" and the second by positions "B", "B/C" and "C".~~

~~According to a first possible configuration identified~~
~~by the closed position "A" of the switches, the~~
25 ~~noninverting input 11b of the first opamp 11 and the~~

noninverting input 41b of the fourth opamp 41 are
directly connected with the inverting input 21a of the
second opamp 21; in addition, the inverting input 41a
of the fourth opamp 41 is directly connected with the
5 noninverting input 31b of the third opamp 31 and the
noninverting input 21b of the second opamp 21 is
connected to the ground.

According to the second possible configuration,
10 identified by the closed positions "B", "B/C" and "C",
the noninverting input 41b of the fourth opamp 41 is
directly connected with the inverting input 11a of the
first opamp 11 (closed position "B"), whereas the
noninverting input 11b of the first opamp 11 is
15 connected to the ground; in addition, the noninverting
input 21b of the second opamp 21 is directly connected
to the inverting input 41a of the fourth opamp 41 and
the inverting input 21a of the second opamp 21 is
directly connected with the noninverting input 31b of
20 the third opamp 31.

Alternatively, in this second configuration it is
provided for the noninverting input 41b of the fourth
opamp 41 to be grounded (closed position "C"), instead

~~of being connected with the inverting input 11a of the first opamp 11.~~

~~In the diagram in Fig. 13 the noninverting input 41b of the fourth opamp 41 is directly connected to the inverting input 21a of the second opamp 21 and a direct connection 77 is interposed between the noninverting input 11b of the first opamp 11 and the inverting input 31a of the third opamp 31.~~

10

~~With reference to Figs. 12 and 13, if resistors 600 and 601 are not used, in relation to the input Vs the output 11c of the first opamp 11 is a -180° out of phase band-pass output, the output 21c of the second opamp 21 is band-bass output that is not out of phase, the output 31c of the third opamp 31 is a 90° out of phase low-pass output, and the output 41c of the fourth opamp 41 is a -90° out of phase low-pass output.~~

20 If resistors 600 and 601 are used, the output 11c of the first opamp 11 is a -180° out of phase band-pass output, the output 21c of the second opamp 21 is a notch output, in which the frequencies different from the one eliminated are 180° out of phase, the output 31c of the third opamp 31 is a 90° out of phase low-

25

pass output, and the output 41c of the fourth opamp 41 is a -90° out of phase low-pass output.

Figs. 7-10 show further embodiments of filter 1. The feedback means 13 of the first stage 10 can consist of a single capacitor or a capacitor connected in series to a resistor, whereas the feedback means 23 of the second stage 20 are defined by a resistor.

10 The feedback means 33 of the third stage 30 can consist of a single capacitor or a capacitor connected in series with a resistor.

The filter 1 shown in Figs. 7-10 also comprises a fourth stage 40 provided with a fourth operational amplifier 41, a first resistor 42 and a second resistor 43.

The first resistor 42 has a first end 42a connected with the inverting input 41a of the fourth opamp 41, and a second end 42b connected to the output 21c of the second opamp 21; the second resistor 43 is connected between the inverting input 41a and the output 41c of the fourth opamp 41. In addition, also provided is a feedback resistor 74 having a first end 74a connected

with the inverting input 11a of the first opamp 11 and a second end 74b connected either to the output 11c of the first opamp 11 or to the output 21c of the second opamp 21.

5

In the circuits in Figs. 7, 9 and 10 a main resistor 60 is connected between the inverting input 11a of the first opamp 11 and a fixed-potential node, preferably grounded; in the circuits in Figs. 8 and 9 a secondary
10 resistor 62 is connected between the inverting input 21a of the second opamp 21 and a fixed-potential node, preferably grounded.

In the diagram in Fig. 7, a direct connection 81 is
15 present between the inverting input 31a of the third opamp 31 and the noninverting input 11b of the first opamp 11; the noninverting input 31b of the third opamp 31 is grounded. In addition, a direct connection 80 is present between the inverting input 41a of the fourth
20 opamp 41 and the noninverting input 21b of the second opamp 21; the noninverting input 41b of the fourth opamp 41 is grounded.

In the diagram in Fig. 8 the noninverting input 11b of
25 the first opamp 11 is grounded; the inverting input 11a

of the first opamp 11 is connected through the direct connection 82 to the noninverting input 41b of the fourth opamp 41. In addition, the noninverting input 21b of the second opamp 21 is connected, through the
5 direct connection 80, to the inverting input 41a of the fourth opamp 41; the noninverting input 31b of the third opamp 31 is grounded.

In the diagram in Fig. 9 a direct connection 85 is
10 interposed between the inverting input 11a of the first opamp 11 and the noninverting input 21b of the second opamp 21, while a direct connection 83 is interposed between the noninverting input 11b of the first operational amplifier 11 and the inverting input 41a of
15 the fourth opamp 41. A further direct connection 84 connects the inverting input 31a of the third opamp 31 and the noninverting input 41b of the fourth opamp 41 with each other; the noninverting input 31b of the third opamp 31 is grounded.

20

In the diagram in Fig. 10, a direct connection 87 connects the noninverting input 11b of the first opamp 11 with the inverting input 21a of the second opamp 21 and a direct connection 80 connects the noninverting
25 input 21b of the second opamp 21 with the inverting

input 41a of the fourth opamp 41. A direct connection
84 connects the inverting input 31a of the third opamp
31 with the noninverting input 41b of the fourth opamp
41; the noninverting input 31b of the third opamp 31
5 is connected to the ground.

With reference to the diagrams in Figs. 7-10, when
resistors 600 and 601 are not used, in relation to the
input V_s , the output 11c of the first opamp 11 is a
10 -180° out of phase band-pass output, the output 21c of
the second opamp 21 is a band-pass output that is not
out of phase, the output 31c of the third opamp 31 is a
 90° out of phase low-pass output and the output 41c of
the fourth opamp 41 is a 180° out of phase band-pass
15 output.

If resistors 600 and 601 are used, the output 11c of
the first opamp 11 is a -180° out of phase band-pass
output, the output 21c of the second opamp 21 is a
20 notch output, in which the frequencies that are not
eliminated are 180° out of phase, the output 31c of the
third opamp 31 is a 90° out of phase low-pass output,
and the output 41c of the fourth opamp 41 is a notch
output in which the frequencies that are not eliminated
25 are not submitted to any phase shift.

Figs. 11, 13, 13a and 14, ~~14a and 15~~ show further embodiments of filter 1.

In these diagrams, the feedback means 13 of the first
5 stage 10 can either consist ~~either~~ of a single
capacitor or ~~of~~ comprise a branch defined by a capacitor
connected in series to a resistor; likewise, the
feedback means 33 of the third stage 30 can comprise a
single capacitor or a capacitor series-connected with a
10 resistor.

Alternatively, the feedback means 33 of the third stage
30 can have two branches connected in parallel with
each other; the first one consists of a single
15 capacitor or a capacitor series-connected to a
resistor, the second one is defined by a single
resistor or a resistor series-connected to a capacitor.

The feedback means 23 of the second stage 20, instead,
20 consists of the resistor 23 alone which is connected
between the inverting input 21a and the output 21c of
the second opamp 21.

Also provided is a fourth stage 40 comprising a fourth
25 opamp 41, a first resistor 42 and a second resistor 43,

the latter being connected between the inverting input 41a and the output 41c of the fourth opamp 41; the first resistor 42 has a first end 42a connected with the inverting input 41a of the opamp 41 and a second
5 end 42b. In circuits 11, 14a and 15 a main resistor 60 is preferably connected between the inverting input 11a of the first opamp 11 and a fixed-potential node, preferably grounded; in Figs. 11, ~~14~~13 and ~~14a~~13a an auxiliary resistor 61 is connected between the
10 inverting input 31a of the third opamp 31 and a fixed potential node, preferably grounded.

~~In addition~~Preferably, a feedback resistor 74 has a first end 74a connected with the inverting input 11a of the first opamp 11 and a second end 74b connected with
15 the output 11c of the first opamp 11 or the output 21 of the second opamp 21.

Preferably, the non inverting input 41b is directly connected (i.e. connected through a short circuit) to the inverting input 21a of the second opamp 21.

20

In more detail, in the circuit in Fig. 11 two configurations are provided that correspond to positions "A" and "B" of the switches present in this diagram.

25

In the configuration ("A"), the noninverting input 11b of the first opamp 11 is connected through the short circuit 90, to the inverting input 31a of the third opamp 31 and the inverting input 21a of the second opamp 21 is connected with the noninverting input 41b of the fourth opamp 41; the noninverting input 21b of the second opamp 21 is connected to the ground. Still in configuration "A" of the circuit in Fig. 11, the noninverting input 31b of the third opamp 31 is connected to the inverting input 41a of the fourth opamp 41 and the second end 42b of the first resistor 42 of the fourth stage 40 is connected to the output 11c of the first opamp 11.

15 In the second configuration in Fig. 11 ("B"), the noninverting input 11b of the first opamp 11 is directly connected to the inverting input 41a of the fourth opamp 41 and the inverting input 31a of the third opamp 31 is connected with the noninverting input 41b of the fourth opamp 41; the noninverting input 21b of the second opamp 21 and the noninverting input 31b of the third opamp 31 are connected to the ground and the second end 42b of the first resistor 42 is connected to the output 11c of the first opamp 11.

With reference to the input signal V_s , if resistors 600 and 601 are not used, the output 11c of the first opamp 11 is a -180° out of phase band-pass, the output 21c of the second opamp 21 is a band-pass output that is not
5 out of phase, the output 31c of the third opamp 31 is a 90° out of phase low-pass output, and the output 41c of the fourth opamp 41 is a band-pass that is not out of phase.

10 If, on the contrary, resistors 600 and 601 are used, the output 11c of the first opamp 11 is a -180° out of phase band-pass output, the output 21c of the second opamp 21 is a notch output in which the non eliminated frequencies are 180° out of phase, and the output 41c
15 of the fourth opamp 41 is a band-pass that is not out of phase.

In the circuit in Fig. 4413, the inverting input 21a of the second opamp 21 is connected with the noninverting
20 input 41b of the fourth opamp 41 and the output 41c of the fourth opamp 41 is connected to the noninverting input 11b of the first opamp 11 and to the noninverting input 31b of the third opamp 31; the noninverting input 21b of the second opamp 21 is connected to the ground,

In addition, the second end 42b of the first resistor 42 is grounded.

In the circuit in Fig. 14a13a a direct connection 90 is
5 interposed between the noninverting input 11b of the first opamp 11 and the inverting input 31a of the third opamp 31; in addition the inverting input 21a of the second opamp 21 is connected to the noninverting input 41b of the fourth opamp 41; the output 41c of the
10 latter is connected to the noninverting input 31b of the third opamp 31, whereas the noninverting input 21b of the second opamp 21 and the second end 42b of the first resistor 42 are grounded.

15 With reference to the diagrams in Figs. 1413 and 14a13a, in relation to the input signal Vs, if use of resistors 600 and 601 is not provided, the output 11c of the first opamp 11 is a -180° out of phase band-pass output, the output 21c of the second opamp 21 is a
20 band-pass output that is not out of phase, and the output 31c of the third opamp 31 is a 90° out of phase low-pass output.

If on the contrary resistors 600 and 601 are used, the
25 output 11c of the first opamp 11 is a -180° out of

phase band-pass output, the output 21c of the second
opamp 21 is a notch output, in which the non eliminated
frequencies are 180° out of phase, and the output 31c
of the third opamp 31 is a 90° out of phase low-pass
5 output.

In the circuit in Fig. ~~4514~~4514, the inverting input 21a of
the second opamp 21 is directly connected with the
noninverting input 41b of the fourth opamp 41, and a
10 direct connection 71 is interposed between the
noninverting input 21b of the second opamp 21 and the
inverting input 31a of the third opamp 31.

The noninverting input 31b of the third opamp 31 and
15 the second end 42b of the first resistor 42 are
grounded, whereas the output 41c of the fourth opamp 41
is connected to the noninverting input 11b of the first
opamp 11.

20 With reference to the diagram in Fig. ~~4514~~4514, in relation
to the input signal V_s , the output 11c of the first
opamp 11 is a -180° out of phase band-pass output, the
output 21c of the second opamp 21 is a band-pass output
that is not out of phase, and the output 31c of the
25 third opamp 31 is a 90° out of phase low-pass output.

Figs. ~~32-36~~19 and 20 show further alternative embodiments of filter 1 in accordance with the present invention.

5

The first opamp 11 is feedbacked by means of the second resistor 13 of the first stage 10. The feedback means 23 of the second stage 20 preferably consists of a first branch comprising a single capacitor or a
10 capacitor series-connected to a resistor; this branch can be connected in parallel to a second branch defined by a resistor and a capacitor in series with each other;~~the~~. The feedback means 33 of the third stage 30 consists of a single capacitor or a capacitor in series
15 with a resistor.

Alternatively, the feedback means 23 of the second stage 20 is defined by a single capacitor or a capacitor in series with a resistor, while the feedback
20 means 33 of the third stage 30 consists of two branches connected in parallel; the first branch comprises a single capacitor or a capacitor in series with a resistor and the second branch comprises a series capacitor and resistor.

25

~~In addition~~Preferably, a feedback branch 103 has a first end 103a connected to the output 21c of the second opamp 21, and a second end 103b connected with the inverting input 11a of the first opamp 11;
5 preferably, the feedback branch 103 comprises a resistor 104.

~~In addition to the above~~Preferably, a feedback branch 101 is provided to be ~~preferably~~ inserted between the
10 inverting input 31a of the third opamp 31 and the output 11c of the first opamp 11; conveniently this feedback branch 101 is defined by a resistor 102.

In the diagrams in Figs. ~~32-36~~19 and 20, a fourth stage
15 40 is preferably present the structure of which is shown in detail in Fig. ~~15a~~33; the fourth stage 40 comprises a fourth operational amplifier 41, a first resistor 42 having a first end 42a connected with the inverting input 41a of the same opamp 41, and a second
20 end 42b connected with the output 21c of the second opamp 21; in addition it comprises a second resistor 43 connected between the inverting input 41a and the output 41c of the fourth opamp 41.

~~In Figs. 32-34 and 36, an~~An auxiliary resistor 61 ~~is~~can
be connected between the inverting input 31a of the
third opamp 31, and a fixed-potential node, preferably
grounded; ~~in Figs. 34 and 35 a~~ secondary resistor 62
5 ~~is~~can be connected between the inverting input 21a of
the second opamp 21 and a fixed potential node,
preferably grounded.

~~In Figs. 33-36.~~ 20 a resistor 109 can be connected
10 between the output 31c of the third opamp 31 and the
inverting input 21a of the second opamp 21. In this
case the feedback means 23 of the second stage 20
alternatively comprises a resistor parallel-connected
to a branch comprising a single capacitor or a
15 capacitor in series with a resistor; the feedback means
33 of the third stage 30 is defined by a single
capacitor or a capacitor in series with a resistor.

In more detail, in the circuit in Fig. ~~32~~19 the output
20 41c of the fourth opamp 41 can be connected to the
inverting input 11a of the first opamp 11 by means of
said resistor 104 if said feedback branch 103 is not
used; the noninverting input 41b of the fourth opamp 41
is connected with the inverting input 21a of the second
25 opamp 21.

In addition, a direct connection 212 is interposed between the inverting input 21a of the second opamp 21 and the noninverting input 31b of the third opamp 31; a
5 direct connection 107 is interposed between the noninverting input 11b of the first opamp 11 and the inverting input 21a of the second opamp 21.

As an alternative to the —mentioned direct connection
10 107, the noninverting input 11b of the first opamp 11 can be connected to the ground through a resistor 105, and to the output 21c of the second opamp 21 through a resistor 106. Finally, the noninverting input 21b of the second opamp 21 is grounded.

15

In the circuit in Fig. 3320, the connections relating to the fourth stage 40 are the same as in the circuit in Fig. 32. ~~A direct connection 203 is interposed between the inverting input 11a of the first opamp 11 and the noninverting input 31b of the third opamp 31,~~
20 ~~whereas a feedback branch 108, preferably defined by a resistor 109, is connected between the output 31c of the third opamp 31 and the inverting input 21a of the second opamp 21.~~ A feedback resistor 106 is connected
25 between the output 21c of the second opamp 21 and the

noninverting input 11b of the first opamp 11, while a
direct connection 212 is interposed between the
inverting input 21a of the second opamp 21 and the
noninverting input 31b of the third opamp 31; the
5 noninverting input 21b of the second opamp 21 is
grounded. In addition, a connecting branch 110 connects
the inverting input 31a of the third opamp 31 with the
noninverting input 11b of the first opamp 11; this
connecting branch 110 may consist either of a direct
10 connection 207 or of a resistor 111.

~~A feedback branch 107 is interposed between the~~
~~inverting input 21a of the second opamp 21 and the~~
~~noninverting input 11b of the first opamp 11; this~~
15 ~~feedback branch 107 can consist either of a direct~~
~~connection or of amplifying means having an input~~
~~connected with the inverting input 21a and an output~~
~~connected with the noninverting input 11b. The~~
~~noninverting input 21b of the second opamp 21 is~~
20 ~~grounded.~~

~~In the circuit in Fig. 34, with reference to the fourth~~
~~stage 40, the noninverting input 41b is connected to~~
~~the inverting input 31a of the third opamp 31.~~
25

~~A direct connection 204 is interposed between the
inverting input 11a of the first opamp 11, and the
noninverting input 21b of the second opamp 21, while a
direct connection 212 is interposed between the
5 inverting input 21a of the second opamp. With reference
to the circuits in Figs. 19 and 20, in relation to the
input signal V_s , the output 11c of the first opamp 11
is a -90 out of phase high-pass output, the output 21c
of the second opamp 21 is a band-pass output that is
10 not out of phase, the output 31c of the third opamp 31
is a 90° out of phase low-pass output, and the output
41c of the fourth opamp 41 (i.e. the output "out" of
the fourth stage 40) is a -180° out of phase band-pass
output.~~

~~15 Figs. 21 and the noninverting input 31b of the third
opamp 31; the noninverting input 11b of the first opamp
11 is grounded.~~

~~In the circuit in Fig. 35, with reference to the fourth
20 stage 40, the noninverting input 41b is connected with
the inverting input 31a of the third opamp 31.~~

~~In addition, a direct connection 204 connects the
inverting input 11a of the first opamp 11 with the
25 noninverting input 21b of the second opamp 21 and a~~

~~direct connection 203 connects the inverting input 11a of the first opamp 11 with the noninverting input 31b of the third opamp 31; the noninverting input 11b of the first opamp 11 is grounded.~~

5

~~In the circuit in Fig. 36, with reference to the fourth stage 40, the noninverting input 41b is connected with the inverting input 21a of the second opamp 21. A feedback resistor 106 is connected between the output 21c of the second opamp 21 and the noninverting input 11b of the first opamp 11, while a direct connection 212 is interposed between the inverting input 21a of the second opamp 21 and the noninverting input 31b of the third opamp 31; the noninverting input 21b of the second opamp 21 is grounded. In addition, a connecting branch 110 connects the inverting input 31a of the third opamp 31 with the noninverting input 11b of the first opamp 11; this connecting branch 110 may consist either of a direct connection 207 or of a resistor 111.~~

20

~~With reference to the circuits in Figs. 32-36, in relation to the input signal V_s , the output 11c of the first opamp 11 is a 90 out of phase high pass output, the output 21c of the second opamp 21 is a band pass output that is not out of phase, the output 31c of the~~

25

~~third opamp 31 is a 90° out of phase low pass output,
and the output 41c of the fourth opamp 41 (i.e. the
output "out" of the fourth stage 40) is a 180° out of
phase band pass output.~~

5

~~Figs. 37-42 and 48-23~~ show further embodiments of
filter 1. The first stage 10 is feedbacked through the
respective second resistor 13 connected between the
output 11c and the inverting input 11a of the first
10 opamp 11.

The feedback means 23 of the second stage 20
preferably consists of a first branch comprising either
a single capacitor or a capacitor series-connected to a
15 resistor; this branch can be parallel-connected to a
second branch defined by a resistor and a capacitor in
series with each other; the feedback means 33 of the
third stage 20 consists of a single capacitor or a
capacitor in series with a resistor.

20 Alternatively, the feedback means 23 of the second
stage 20 is defined by a single capacitor or a
capacitor in series with a resistor, while the feedback
means 33 of the third stage 30 consists of two
parallel-connected branches; the first branch comprises
25 a single capacitor or a capacitor in series with a

resistor and the second branch comprises a capacitor and a resistor in series.

A feedback branch 101, defined in particular by a resistor 102, connects the inverting input 31a of the third opamp 31 with the output 11c of the first opamp 11, and a feedback branch 103, preferably defined by a resistor 104, connects the output 21c of the second opamp 21 with the inverting input 11a of the first opamp 11.

In addition to the above, a fourth stage 40 is connected to the ~~three first~~other stages; this fourth stage 40 is provided with a fourth opamp 41, a first resistor 42 and a second resistor 43, said second resistor 43 being connected between the inverting input 41a and the output 41c of the fourth opamp 41. The second resistor 42 has a first end 42a connected with the inverting input 41a of the fourth opamp 41.

20

~~In the circuits in Fig. 37, 38, 40 and 48~~The inverting input 41a is preferably connected with the non inverting input 11b, 21b, 31b of at least one of said first, second and third opamp 11, 21, 31, either
25 directly or through a resistor.

In the circuit in Fig. 23, an auxiliary resistor 61 is connected between the inverting input 31a of the third opamp 31 and a fixed-potential node, preferably grounded; in the circuits in Fig. 37, ~~41 and 42~~22 a
5 secondary resistor 62 is connected between the inverting input 21a of the second opamp 21 and a fixed-potential node, preferably grounded; in the circuits in Fig. 39, ~~40 and 41~~21, a main resistor 60 is connected with the inverting input 11a of the first opamp 11 and
10 a fixed-potential node, preferably grounded.

~~In more detail, the circuit in Fig. 37 has two possible configurations identified by positions "A" and "B" of the switches present in said circuit.~~

15

~~In the configuration "A", a direct connection 218 connects the inverting input 11a of the first opamp 11 with the noninverting input 41b of the fourth opamp 41.~~

20 ~~A direct connection 219 connects the noninverting input 21b of the second opamp 21 with the inverting input 41a of the fourth opamp 41, while the inverting input 21a of the second opamp 21 is directly connected (connection 212) with the noninverting input 31b of the~~
25 ~~third opamp 31.~~

In the configuration "B", the inverting input 21a of the second opamp 21 is directly connected to the noninverting input 41b of the fourth opamp 41, while
5 the noninverting input 21b of the second opamp 21 is connected to the ground; in addition, the noninverting input 31b of the third opamp 31 is directly connected with the inverting input 41a of the fourth opamp 41.

10 Irrespective of the adopted configuration ("A" or "B"), the noninverting input 11b of the first opamp 11 is grounded, the second end 42b of the first resistor 42 of the fourth stage 40 is connected to the output 31c of the third opamp 31.

15

It is to be pointed out that, with reference to the diagram in Fig. 37, the feedback means 23 of the second stage 20 can have an alternative structure to the above stated structure; it is in fact provided that this
20 feedback means 23 should be defined by a first branch comprising a single capacitor or a capacitor in series with a resistor and by a second branch parallel connected with the first branch and comprising a single resistor; with such a configuration of the feedback
25 means 23 filter 1 is preferably provided with a

~~feedback resistor 109 connected between the output 31c of the third opamp 31 and the inverting input 21a of the second opamp 21.~~

5 ~~In the circuit in Fig. 37, with reference to the input signal V_s , the output 11c of the first opamp 11 is a -90° out of phase high pass output, the output 21c of the second opamp 21 is a band pass output that is not out of phase, the output 31c of the third opamp 31 is a~~
10 ~~90° out of phase low pass output and the output 41c of the fourth opamp 41 is a -90° out of phase low pass output.~~

~~In the circuit in Fig. 38 the noninverting input 11b of~~
15 ~~the first opamp 11 is connected to the inverting input 41a of the fourth opamp 41, through either a direct connection 213 or a resistor 113; the noninverting input 11b of the first opamp 11 can also be connected to the output 21c of the second opamp 21 through the~~
20 ~~feedback resistor 106.~~

~~A direct connection 212 is interposed between the inverting input 21a of the second opamp 21 and the noninverting input 31b of the third opamp 31, while the~~
25 ~~noninverting input 21b of the second opamp 21 is~~

~~grounded. In addition, the noninverting input 41b of
the fourth opamp 41 is grounded and the second end 42b
of the first resistor 42 of the fourth stage 40 is
connected to the output 11c of the first opamp 11.~~

5 ~~In the circuit in Fig. 39,~~ the noninverting input 11b
of the first opamp 11 is connected to the inverting
input 41a of the fourth opamp 41, through either a
direct connection 213 or a resistor 113; the
noninverting input 11b of the first opamp 11 can also
10 be connected to the output 21c of the second opamp 21,
through the feedback resistor 106.

The output 11c of the first opamp 11 is connected with
the second end 42b of the first resistor 42 of the
15 fourth stage 40, and the noninverting input 41b of the
fourth opamp 41 is directly connected with the
inverting input 31a of the third opamp 31. The
noninverting input 21b and 31b of the second and third
operational amplifiers 21, 31 respectively are
20 connected to the ground.

In the circuit in Fig. ~~40,~~ a feedback branch 110
~~connects the noninverting input 11b of the first opamp
11 with the inverting input 31a of the third opamp 31;~~
25 ~~this branch 110 can be made either as a short circuit~~

~~207 or as a resistor 111~~ 22, the noninverting input 11b
of the first opamp 11 is grounded while a direct
connection 212 is interposed between the inverting
input 21a of the second opamp 21 and the noninverting
5 input 31b of the third opamp 31; a direct connection
219 connects the noninverting input 21b of the second
opamp 21 with the inverting input 41a of the fourth
opamp 41 and a further direct connection 218 connects
the noninverting input 41b of the fourth opamp 41 with
10 the inverting input 11a of the first opamp 11. The
second end 42b of the first resistor 42 of the fourth
stage 40 is connected to the output 21c of the second
opamp 21.

15 In addition, ~~a feedback resistor 106 can connect the~~
~~noninverting input 11b of the first opamp 11 with the~~
~~output 21c of the second opamp 21; the output 11c of~~
~~the first opamp 11 is also connected with the second~~
~~end 42b of the first resistor 42 of the fourth stage~~
20 40.

~~The inverting input 21a of the second opamp 21 is~~
~~directly connected with the noninverting input 41b of~~
~~the fourth opamp 41 and the noninverting input 21b of~~
25 ~~the second opamp 21 is grounded; a direct connection~~

~~217 is interposed between the noninverting input 31b of the third opamp 31 and the inverting input 41a of the fourth opamp 41.~~

5 ~~The circuit in Fig. 41 can have two different configurations, the first one being identified by position "A", the second by positions "B", "B/C" and "C".~~ 23, a connection 203 connects the inverting input 11a of the first opamp 11 with the noninverting input
10 31b of the third opamp 31; with reference to the fourth stage 40, the inverting input 41a is connected (direct connection 213) with the noninverting input 11b of the first opamp 11, the second end 42b of the first resistor 42 is connected with the output 11c of the
15 first opamp 11 and the noninverting input 41b is connected with the inverting input 21a of the second opamp 21. The noninverting input 21b of the second opamp 21 is grounded.

20 ~~In the first configuration ("A"), the noninverting input 11b of the first opamp 11 is connected to the ground and the inverting input 11a of the first opamp 11 is directly connected with the noninverting input 31b of the third opamp 31; the noninverting input 21b~~
25 ~~of the second opamp 21 is directly connected with the~~

~~inverting input 41a of the fourth opamp 41 and the
noninverting input 41b of the fourth opamp 41 is
connected with the inverting input 11a of the first
opamp 11 (connection 218).~~

5

~~In the second configuration ("B", "B/C" and "C"), the
noninverting input 11b of the first opamp 11 is
connected with the inverting input 41a of the fourth
opamp 41 (connection 220), and the inverting input 11a
of the first opamp 11 is connected with the
noninverting input 21b of the second opamp 21
(connection 204); in addition, the noninverting input
31b of the third opamp 31 is grounded.~~

10

15 ~~The noninverting input 41b of the fourth opamp 41 is
connected to the inverting input 31a of the third opamp
31 (position "B"); alternatively, the noninverting
input 41b is connected to the ground (position "C").~~

20 ~~Irrespective of the adopted configuration, the output
41c of the fourth opamp 41 can be connected with the
inverting input 11a of the first opamp 11 through
resistor 104 and the second end 42b of the first
resistor 42 of the fourth stage 40 is connected to the
output 21c of the second opamp 21.~~

25

In both the circuits shown in Figs. 21 and 23, in relation to the input signal V_s , the output 11c of the first opamp 11 is a -90° out of phase high-pass output, the output 21c of the second opamp 21 is a band-pass output that is not out of phase, the output 31c of the third opamp 31 is a 90° out of phase low-pass output, and the output 41c of the fourth opamp 41 (i.e. the output of the fourth stage 40) is a 90° out of phase high-pass output.

In the circuit in Fig. 42, ~~the noninverting input 11b of the first opamp 11 is grounded while a direct connection 212 is interposed between the inverting input 21a of the second opamp 21 and the noninverting input 31b of the third opamp 31; a direct connection 219 connects the noninverting input 21b of the second opamp 21 with the inverting input 41a of the fourth opamp 41 and a further direct connection 218 connects the noninverting input 41b of the fourth opamp 41 with the inverting input 11a of the first opamp 11.~~ 22, in relation to the input signal V_s , the output 11c of the first opamp 11 is a -90° out of phase high-pass output, the output 21c of the second opamp 21 is a band-pass output that is not out of phase, the output 31c of the third opamp 31 is a 90° out of phase low-

pass output and the output 41c of the fourth opamp 41
is a -180° out of phase band-pass output.

The diagram in Fig. 15 shows a further embodiment of
filter 1. The second end 42b feedback means 13 of the
5 first resistor 42 of the fourth stage 40 is connected
to the output 21c of the second opamp 21.

~~In the circuit in Fig. 48, a connection 203 connects~~
~~the inverting input 11a of the first opamp 11 with the~~
10 ~~noninverting input 31b of the third opamp 31, with~~
~~reference to the fourth stage 40, the inverting input~~
~~41a is connected (direct connection 213) with the~~
~~noninverting input 11b of the first opamp 11, the~~
~~second end 42b of the first resistor 42 is connected~~
15 ~~with the output 11c of the first opamp 11 and the~~
~~noninverting input 41b is connected with the inverting~~
~~input 21a of the second opamp 21. The noninverting~~
~~input 21b of the second opamp 21 is grounded.~~

20 ~~In the circuit shown in Fig. 37, in relation to the~~
~~input signal V_s , the output 11c of the first opamp 11~~
~~is a 90° out of phase high pass output, the output 21c~~
~~of the second opamp 21 is a band pass output that is~~
~~not out of phase, the output 31c of the third opamp 31~~
25 ~~is a 90° out of phase low pass output and the output~~

~~41c of the fourth opamp 41 is a 90° out of phase low pass output.~~

~~In the circuits shown in Figs. 38 40 and 48, in~~
5 ~~relation to the input signal V_s , the output 11c of the~~
~~first opamp 11 is a 90° out of phase high pass output,~~
~~the output 21c of the second opamp 21 is a band pass~~
~~output that is not out of phase, the output 31c of the~~
~~third opamp 31 is a 90° out of phase low pass output,~~
10 ~~and the output 41c of the fourth opamp 41 (i.e. the~~
~~output of the fourth stage 40) is a 90° out of phase~~
~~high pass output.~~

~~In the circuits in Figs. 41 and 42, in relation to the~~
15 ~~input signal V_s , the output 11c of the first opamp 11~~
~~is a 90° out of phase high pass output, the output 21c~~
~~of the second opamp 21 is a band pass output that is~~
~~not out of phase, the output 31c of the third opamp 31~~
~~is a 90° out of phase low pass output and the output~~
20 ~~41c of the fourth opamp 41 is a 180° out of phase~~
~~band pass output.~~

~~The diagrams in Figs. 43, 44 and 47 show further~~
~~embodiments of filter 1.~~

~~The first stage 10 is feedbacked with the resistor 13 alone connected between the inverting input 11a and the output 11c of the first opamp 11.~~

5 ~~The feedback means 23 of the second stage 20 preferably~~
~~consists~~can consist of a first branch comprising a
single capacitor or a capacitor in series connected
with a resistor; this branch can be connected in
parallel with a second branch defined by a single
10 ~~resistor or a resistor in series with a capacitor; the~~
~~feedback means 33 of the third stage 30 consists of a~~
~~single capacitor or a capacitor in series with a~~
~~resistor.~~

15 ~~Alternatively, the feedback means 23 of the second~~
~~stage 20 is defined by a single capacitor or a~~
~~capacitor in series with a resistor, whereas the~~
~~feedback means 33 of the third stage 30 consists of two~~
~~branches connected in parallel; the first branch~~
20 ~~comprises a single capacitor or a capacitor in series~~
~~with a resistor and the second branch comprises a~~
~~capacitor and a resistor in series.~~

~~A feedback resistor 109 is connected between the output~~
25 ~~31c of the third opamp 31 and the inverting input 21a~~

~~of the second opamp 21, together with insertion of this
resistor 109, with reference to the above it is
preferred for the feedback means 23 of the second stage
20 to be defined by a resistor connected in parallel
5 with a branch comprising a single capacitor or a
capacitor in series with a resistor.~~

~~A feedback branch 101, preferably defined by a resistor
102, can be interposed between the output 11c of the
10 first opamp 11 and the inverting input 31a of the third
opamp 31, a feedback branch 103, preferably defined by
a resistor 104, connects the output 21c of the second
opamp 21 with the inverting input 11a of the first
opamp 11.~~

15

~~In addition to the above, a fourth stage 40 is provided
to be connected with the remainder of the circuit; the
fourth stage 40 has a fourth operational amplifier 41,
a first resistor 42 and a second resistor 43, the
20 latter being connected between the output 41c and the
inverting input 41a of the fourth opamp 41. The first
resistor 42 has a first end 42a connected with the
inverting input 41a of the fourth opamp 41 and a second
end 42b.~~

25

~~In the circuit in Fig. 43, the noninverting input 11b of the first opamp 11 is grounded, and a direct connection 218 is interposed between the inverting input 11a of the first opamp 11 and the noninverting input 41b of the fourth opamp 41; the second end 42b of the first resistor 42 of the fourth stage 40 is grounded and the output 41c of the fourth opamp 41 is connected to the noninverting input 21b of the second opamp 21.~~

10

~~A direct connection 212 connects the inverting input 21a of the second opamp 21 with the noninverting input 31b of the third opamp 31.~~

15 ~~In the circuit in Fig. 44, the noninverting input 21b of the second opamp 21 is grounded and a direct connection 218 is interposed between the inverting input 11a of the first opamp 11 and the noninverting input 41b of the fourth opamp 41; the output 41c of the~~
20 ~~latter is connected to the noninverting input 31b of the third opamp 31.~~

~~A direct connection 107 is further provided between the noninverting input 11b of the first opamp 11 and the~~
25 ~~inverting input 21a of the second opamp 21.~~

In the circuit in Fig. 47, the noninverting input 11b of the first opamp 11 and the second end 42b of the first resistor 42 of the fourth stage 40 are connected to the ground; a direct connection 218 connects the inverting input 11a of the first opamp 11 with the noninverting input 41b of the fourth opamp 41, while the output 41c of the latter is connected to the noninverting inputs 21b, 31b of the second and third operational amplifiers 21, 31.

With reference to the circuits in Figs. 43, 44 and 47, in relation to the input signal V_s , the output 11c of the first opamp 11 is a 90° out of phase high pass output, the output 21c of the second opamp 21 is a band pass output that is not out of phase, and the output 31c of the third opamp 31 is a 90° out of phase low pass output.

The diagrams in Figs. 49-51 show further embodiments of filter 1.

The first stage 10 is feedbacked with the resistor 13 alone. The feedback means 23 of the second stage 20 preferably consists of a first branch comprising a

~~single capacitor or a capacitor series connected with a resistor; this branch can be connected in parallel with a second branch, defined by a resistor in series with a capacitor; the feedback means 33 of the third stage 30~~
5 ~~consists of a single capacitor or a capacitor in series with a resistor.~~

~~Alternatively, the feedback means 23 of the second stage 20 is defined by a single capacitor or a~~
10 ~~capacitor in series with a resistor, while the feedback means 33 of the third stage 30 consists of two branches connected in parallel; the first branch comprises a single capacitor or a capacitor in series with a resistor and the second branch comprises a capacitor~~
15 ~~and a resistor that are in series.~~

~~A feedback branch 101 preferably defined by a resistor 102 can be interposed in circuit between the inverting input 31a of the third opamp 31 and the output 11c of~~
20 ~~the first opamp 11, and a feedback branch 103 preferably defined by a resistor 104 can connect the output 21c of the second opamp 21 with the inverting input 11a of the first opamp 11.~~

~~A fourth stage 40 is also contemplated; this stage 40 is provided with a fourth opamp 41, a first resistor 42 and a second resistor 43, the latter being connected between the inverting input 41a and the output 41c of the fourth opamp 41. The first resistor 42 of the fourth stage 40 is connected between the inverting input 41a of the fourth opamp 41 and the noninverting input 11b of the first opamp 11.~~

~~10 In the diagrams in Figs. 49 and 51 an auxiliary resistor 61 is connected between the inverting input 31a of the third opamp 31 and a fixed potential node that is preferably a grounded node; in the diagrams in Figs. 49 and 50, a secondary resistor 62 is connected between the inverting input 21a of the second opamp 21 and a fixed potential node, preferably a grounded node.~~

~~It is also to be pointed out that in the circuits in Figs. 49-51 the input signal V_s is supplied to the noninverting input 11b of the first opamp 11 through resistor 14; the first stage 10 is further provided with a third resistor 53 connected between the noninverting input 11b of the first opamp 11 and the ground.~~

~~A connecting resistor 52 is interposed between the
noninverting input 11b of the first opamp 11 and the
output 21c of the second opamp 21 and the inverting
input 11a of the first opamp 11 is connected with the
5 noninverting input 41b of the fourth opamp 41, through
a resistor 57.~~

~~In more detail, in the circuit in Fig. 49 a direct
connection 212 is interposed between the inverting
10 input 21a of the second opamp 21 and the noninverting
input 31b of the third opamp 31, the output 41c of the
fourth opamp 41 is connected to the noninverting input
21b of the second opamp 21 and a dividing resistor 56
is connected between the noninverting input 41b of the
15 fourth opamp 41 and the ground.~~

~~In the circuit in Fig. 50, the output 41c of the fourth
opamp 41 is connected with the noninverting inputs 21b,
31b of the second and third operational amplifiers 21,
20 31 and a dividing resistor 56 is connected between the
noninverting input 41b of the fourth opamp 41 and the
ground.~~

~~In the circuit in Fig. 51, the noninverting input 21b
25 of the second opamp 21 is grounded and the output 41c~~

of the fourth opamp 41 is connected with the
noninverting input 31b of the third opamp 31. A first
connection resistor 54 is connected between the
noninverting input 41b of the fourth opamp 41 and the
5 inverting input 21a of the second opamp 21; a second
connection resistor 55 is connected between the
inverting input 41a of the fourth opamp 41 and the
ground.

10 With reference to the diagrams in Figs. 49-51, in
relation to the input signal V_s , the output 11c of the
first opamp 11 is a 90° out of phase high pass output,
the output 21c of the second opamp 21 is a 180° out
of phase band pass output, and the output 31c of the
15 third opamp 31 is 90° out of phase low pass output.

Figs. 45 and 46 show two further embodiments of filter
1. The first stage 10 is feedbacked by means of
resistor 13, while both the feedback means 23 of the
20 second stage 20 and the feedback means 33 of the third
stage 30 may consist of a single capacitor or a
capacitor in series with a resistor.

In these circuits, a secondary resistor 62 is connected
25 between the inverting input 21a of the second opamp 21

and a fixed potential node, preferably a grounded node,
and in the circuit in Fig. 45 an auxiliary resistor 61
is connected between the inverting input 31a of the
third opamp 31 and a fixed potential node, preferably a
5 grounded node.

Also provided is a fourth stage 40 having a fourth
operational amplifier 41, a first resistor 42 and a
second resistor 43, the last mentioned resistor having
10 a first end 43a connected with the inverting input 41a
of the fourth opamp 41 either directly or through a
further resistor, and a second end 43b connected with
the output 41c of the fourth opamp 41 itself.

15 The first resistor 42 is connected between the first
end 43a of the second resistor 43 and the ground; a
direct connection 218 is interposed between the
inverting input 11a of the first opamp 11 and the
noninverting input 41b of the fourth opamp 41.

20

In addition, a connecting network 45 is interposed
between the first stage 10 and the fourth stage 40;
this connecting network comprises a first resistor 46
connected between the first end 43a of the resistor 43
25 and the output 21c of the second opamp 21, a second

resistor 47 connected between the output 21c of the
second opamp 21 and the noninverting input 11b of the
first opamp 11 and a third resistor 48 connected
between the noninverting input 11b of the first opamp
5 11 and the ground.

In the circuit in Fig. 45, the output 41c of the fourth
opamp 41 is connected with the noninverting input 21b
of the second opamp 21 and a direct connection 212 is
10 interposed between the noninverting input 31b of the
third opamp 31 and the inverting input 21a of the
second opamp 21. In the circuit in Fig. 46 the output
41c of the fourth opamp 41 is connected both with the
noninverting input 21b of the second opamp 21 and the
15 noninverting input 31b of the third opamp 31.

With reference to the circuits in Figs. 45 and 46, in
relation to the input signal V_s , the output 11c of the
first opamp 11 is a 90° out of phase high pass output,
20 the output 21c of the second opamp 21 is a band pass
output that is not out of phase and the output 31c of
the third opamp 31 is a 90° out of phase low pass
output.

~~The diagrams in Figs. 16-20 show further embodiments of filter 1. The feedback means 13 of the first stage 10 can consist of a branch comprising a single capacitor or a capacitor in series with a resistor; this branch~~
5 ~~can be connected in parallel with a resistor.~~

The feedback means 23 of the second stage 20 may comprise a single capacitor or a capacitor series-connected with a resistor.

10 The third opamp 31 is feedbacked through second resistor 32.

Also provided is preferably a fourth stage 40 the structure of which is shown in Fig. ~~15a~~33; the output 41c of the fourth opamp 41 can be connected to the
15 inverting input 11a of the first opamp 11, through a resistor 44, and the second end 42b of the first resistor 42 is connected with the output 11c of the first opamp 11.

20 ~~In the circuits under examination, a~~ A feedback resistor 206 is preferably connected between the output 11c of the first opamp 11 and the inverting input 31a of the third opamp 31.

In addition, ~~in the circuits in Figs. 16-18 and 20,~~ a
main resistor 60 is connected between the inverting
input 11a of the first opamp 11 and a fixed-potential
node, preferably a grounded node.

5 A secondary resistor 62 ~~is~~ can be connected between the
inverting input 21a of the second opamp 21 and a fixed-
potential node, preferably a ~~grounded node, while in~~
~~the circuits in Figs. 17.~~

A direct connection 207 preferably connects the
10 noninverting input 11b of the first opamp 11 with the
inverting input 31a of the third opamp 31 and ~~19 a main~~
~~resistor 60 is connected between the inverting input~~
~~11a of the first opamp 11 and a fixed potential node,~~
~~preferably a grounded node.~~

15
~~In the diagram in Fig. 16 the noninverting input 11b of~~
~~the first opamp 11 is grounded and the inverting input~~
~~11a of the first opamp 11 is connected with the~~
~~noninverting input 31b of the third opamp 31, through a~~
20 ~~branch 203; this branch 203 can consist of a short~~
~~circuit or of amplification means. It is also to be~~
~~noted that a direct connection 201 is interposed~~
~~between the noninverting input 21b of the second opamp~~
~~21 and the inverting input 31a of the third opamp 31,~~
25 ~~while the noninverting input 41b of the fourth opamp 41~~

~~is connected with the inverting input 11a of the first
opamp 11.~~

~~In the circuit in Fig. 17, a direct connection 204
5 connects the inverting input 11a of the first opamp 11
with the noninverting input 21b of the second opamp 21
and a direct connection 207 connects the noninverting
input 11b of the first opamp 11 with the inverting
input 31a of the third opamp 31. The noninverting input
10 41b of the fourth opamp 41 is connected to the
inverting input 21a of the second opamp 21 and the
noninverting input 31b of the third opamp 31 is
grounded.~~

~~15 In the circuit in Fig. 18, a direct connection 204
connects the inverting input 11a of the first opamp 11
and the noninverting input 21b of the second opamp 21,
while the noninverting input 11b of the first opamp 11
is connected to the ground. A direct connection 212 is
20 interposed between the inverting input 21a of the
second opamp 21 and the noninverting input 31b of the
third opamp 31; in addition, the noninverting input 41b
of the fourth opamp 41 is connected with the inverting
input 11a of the first opamp 11.~~

~~In the circuit in Fig. 19, a direct connection 207 connects the noninverting input 11b of the first opamp 11 with the inverting input 31a of the third opamp 31 and a direct connection 201 connects the noninverting~~
5 ~~input 21b of the second opamp 21 with the inverting input 31a of the third opamp 31. The noninverting input 31b of the third opamp 31 is grounded and the noninverting input 41b of the fourth opamp 41 is connected to the inverting input 21a of the second~~
10 ~~opamp 21.~~

~~In the circuit in Fig. 20 a direct connection 204 connects the inverting input 11a of the first opamp 11 with the noninverting input 21b of the second opamp 21 and a direct connection 203 connects the inverting~~
15 ~~input 11a of the first opamp 11 with the noninverting input 31b of the third opamp 31. The noninverting input 11b of the first opamp 11 is grounded, whereas the noninverting input 41b of the fourth opamp 41 is connected with the inverting input 11a of the first~~
20 ~~opamp 11.~~

With reference to the ~~circuit~~same circuit in Figs. 16-
20. 15, in relation to the input signal V_s , the output 11c of the first opamp 11 is a -180° out of phase band-
25 pass output, the output 21c of the second opamp 21 is a

-90° out of phase low-pass output, the output 31c of the third opamp 31 is a 90° out of phase low-pass output, and the output 41c of the fourth opamp 41 (i.e. the "out" output of the fourth stage 40) is a band-pass
5 output that is not out of phase.

The diagrams in Figs. ~~27 and 28 show~~. 17 shows a further embodiments of filter 1. The feedback means 13 of the first stage 10 can consist of a single
10 capacitor, or of a capacitor series- or parallel-connected with a resistor, or of a resistor parallel-connected with a branch defined by a capacitor and a resistor in series with each other. The feedback means
23 of the second stage comprises a single capacitor or
15 a capacitor in series with a resistor; the third stage 30 is feedbacked by means of resistor 33.

A main resistor 60 is connected between the inverting input 11a of the first opamp and a fixed-potential
20 node, preferably a grounded node; ~~in the circuit in Fig. 28, in addition,~~ an auxiliary resistor 61 is connected between the inverting input 31a of the third opamp 31 and a fixed-potential node, preferably a grounded node.

A feedback resistor 206 can be interposed between the output 11c of the first opamp 11 and the inverting input 31a of the third opamp 31; also provided is a fourth stage 40 having a fourth opamp 41, a first resistor 42 and a second resistor 43.

The first resistor 42 is connected between the output 11c of the first opamp 11 and the inverting input 41a of the fourth opamp 41, and the second resistor 43 is connected between the inverting input 41a and the output 41c of the fourth opamp 41 itself. The output 41c of the fourth opamp 41 can be connected with the inverting input 11a of the first opamp 11, through a resistor 44.

15

~~In the~~ The circuit in Fig. 27, a direct connection 204 is interposed between the inverting input 11a of the first opamp 11 and the noninverting input 21b of the second opamp 21 and a direct connection 213 is interposed between the noninverting input 11b of the first opamp 11 and the inverting input 41a of the fourth opamp 41. The noninverting input 41b of the fourth opamp 41 is connected with the inverting input 31a of the third opamp 31, while the noninverting input 31b of the third opamp 31 is connected to the ground.

~~The circuit in Fig. 2817~~ shows two possible configurations, the first one being identified by position "A" (17(A)), the second one being identified
5 by positions "B, "B/C" and "C" of the switches therein present. In the first configuration ("A") a direct connection 213 connects the noninverting input 11b of the first opamp 11 with the inverting input 41a of the fourth opamp 41, while the noninverting input 41b of
10 the fourth opamp 41 is directly connected with the inverting input 31a of the third opamp 31. A direct connection 201 is interposed between the noninverting input 21b of the second opamp 21 and the inverting input 31a of the third opamp 31, while the input 31b of
15 the third opamp 31 is grounded.

In the second configuration ("B", "B/C", "C"), a direct connection 207 connects the noninverting input 11b of the first opamp 11 with the inverting input 31a of the
20 third opamp 31 and the noninverting input 41b of the fourth opamp 41 is connected either to the ground (position "C"), or to the inverting input 21a of the second opamp 21 (position "B"). The noninverting input 21b of the second opamp 21 is connected to the ground
25 and the noninverting input 31b of the third opamp 31 is

directly connected with the inverting input 41a of the fourth opamp 41.

With reference to the ~~circuits~~same circuit in Figs. ~~27~~
5 ~~and 28.~~ 17, in relation to the input signal V_s , the output 11c of the first opamp 11 is a -180° out of phase band-pass output, the output 21c of the second opamp 21 is a -90° out of phase low-pass output, the output 31c of the third opamp 31 is a 90° out of phase
10 low-pass output, and the output 41c of the fourth opamp 41 is a band-pass output that is not out of phase.

The ~~diagrams~~circuit in Figs. ~~23-26~~ show. 18 shows a further embodiments of filter 1. The feedback means 13
15 of the first stage 10 can consist either of a single capacitor, or of a capacitor and a resistor connected in series with each other. The feedback means 23 of the second stage 20 can consist of a single capacitor, a capacitor connected in ~~series-connected~~ with a
20 resistor, or ~~two branches connected in parallel~~ with each other in parallel; the first branch is defined by a single capacitor or ~~a capacitor~~ series-connected ~~in series~~ with a resistor and the second branch is defined by a single resistor or a resistor series-connected
25 with a capacitor.

The third stage 30 is feedbacked through resistor 33.
~~In addition a feedback resistor 206 has a first end~~
~~206a connected with the output 11c of the first opamp~~
~~11 and a second end 206b connected with the inverting~~
5 ~~input 11a of the first opamp 11 or with the inverting~~
~~input 31a of the third opamp 31.~~ A fourth stage 40 has
a fourth opamp 41, a first resistor 42 and a second
resistor 43; the first resistor 42 is connected between
the inverting input 41a and a fixed potential node,
10 preferably grounded, while the second resistor 43 is
connected between the inverting input 41a and the
output 41c of the fourth opamp 41; the noninverting
input 41b of the fourth opamp 41 is directly connected
with the inverting input 31a of the third opamp 31.

15

~~Also—~~ The output 41c of the fourth opamp 41 is
preferably connected with the noninverting inputs 11b,
21b of the first and second operational amplifiers 11,
21 and the noninverting input 31b of the third opamp 31
20 is grounded.

With reference to the same circuit in Figs. 18, in
relation to the input signal V_s , the output 11c of the
first opamp 11 is a -180° out of phase band-pass
output, the output 21c of the second opamp 21 is a -90°

out of phase low-pass output, and the output 31c of the
third opamp 31 is a 90° out of phase low-pass output.

Fig. 24 shows a further embodiment of filter 1. The
feedback means 13 of the first stage 10 can consist of
5 a single capacitor or a capacitor in series with a
resistor. The feedback means 23 of the second stage 20
can consist of a single capacitor or a capacitor in
series with a resistor. The third stage 30 is
feedbacked through resistor 33.

10 Preferably feedback resistor 102 has a first end 102a
connected with the inverting input 11a of the first
opamp 11 or the inverting input 31a of the third opamp
31, and a second end 102b connected with the output 11c
of the first opamp 11. A main resistor 60 can be
15 connected between the inverting input 11a of the first
opamp 11 and a fixed-potential node, preferably a
grounded node. A secondary resistor 62 can be connected
between the inverting input 21a of the second opamp 21
and a fixed-potential node, preferably a grounded node.

20 A fourth stage 40 is provided ~~is a fourth stage 40~~
~~comprising with~~ a fourth opamp 41, a first resistor 42
and a second resistor 43, the latter being connected
between the inverting input 41a and the output 41c of
the fourth opamp 41; the first resistor 42 is connected

between the inverting input 41a of the fourth opamp 41
and the ~~output 31c of the third opamp 31.~~

~~In the circuits of Figs. 23-25, a secondary resistor 62~~
5 ~~is connected between the inverting input 21a of the~~
~~second opamp 21 and a fixed potential node, preferably~~
~~a grounded node; in the circuits in Figs. 24 and 26 an~~
~~auxiliary resistor 61 is connected between the~~
~~inverting input 31a of the third opamp 31 and a fixed~~
10 ~~potential node, preferably a grounded node.~~

~~In more detail, in the circuit in Fig. 23 a direct~~
~~connection 204 connects the inverting input 11a of the~~
~~first opamp 11 with the noninverting input 21b of the~~
15 ~~second opamp 21, while the noninverting input 11b of~~
~~the first opamp 11 is grounded. A direct connection 217~~
~~is interposed between the inverting input 41a of the~~
~~fourth opamp 41 and the noninverting input 31b of the~~
~~third opamp 31; the . The noninverting input 41b of the~~
20 ~~fourth opamp 41 is grounded.~~

~~In the circuit in Fig. 24 a direct connection 218 is~~
~~interposed between the connected to the inverting input~~
~~11a of the first opamp 11 and the noninverting input~~
25 ~~41b of the fourth opamp 41, while the noninverting~~

~~input 11b of the first opamp 11 is grounded. The~~
~~output 41c of the fourth opamp 41 can be connected,~~
~~preferably in a direct manner (connection 215), to the~~
~~noninverting input 21b of the second opamp 21. A direct~~
5 ~~connection 219~~207 preferably connects the noninverting
~~input 21b11b of the secondfirst opamp 21-11 with the~~
~~inverting input 41a31a of the fourththird opamp 41, and~~
~~a direct connection 212 connects the inverting input~~
~~21a of the second opamp 21 with~~31; the noninverting
10 ~~input 31b of the third opamp 31 is connected to a fixed~~
~~potential node, preferably grounded.~~

~~In~~With reference to the circuit~~diagram~~ in Fig. 24, in
~~relation to the input signal Vs, the output 11c of the~~
15 ~~first opamp 11 is a -180° out of phase band-pass~~
~~output, the output 21c of the second opamp 21 is a -90°~~
~~out of phase low-pass output, and the output 31c of the~~
~~third opamp 31 is a 90° out of phase low-pass output.~~

The diagrams in Figs. 25~~a direct connection 218~~
20 ~~connects the inverting input 11a of the first opamp 11~~
~~with the noninverting input 41b of the fourth opamp 41,~~
~~while the noninverting input 11b of the first opamp 11~~
~~is grounded. A direct connection 201 is interposed~~
~~between the noninverting input 21b of the second opamp~~
25 ~~21 and the inverting input 31a of the third opamp 31,~~

~~in addition, a direct connection 217 connects the
noninverting input 31b of the third opamp 31 with the
inverting input 41a of the fourth opamp 41.~~

5 ~~In the circuit in Fig. 26 the noninverting inputs 11b,
21b of the first and second operational amplifiers 11,
21 are grounded and a direct connection 223 is
interposed between the inverting input 21a of the
second opamp 21 and the noninverting input 41b of the
10 fourth opamp 41; in addition, a direct connection 217
connects the noninverting input 31b of the third opamp
31 with the inverting input 41a of the fourth opamp 41.~~

~~With reference to the circuits in Figs. 23-26, in
15 relation to the input signal V_s , the output 11c of the
first opamp 11 is a 180° out of phase band pass
output, the output 21c of the second opamp 21 is a 90°
out of phase low pass output, the output 31c of the
third opamp 31 is a 90° out of phase low pass output
20 and the output 41c of the fourth opamp 41 is a 90° out
of phase low pass output.~~

~~The circuits in Figs. 29-31 show further embodiments
of filter 1. The feedback means 13 of the first stage
25 10 can consist either of a single capacitor, or of a~~

capacitor and a resistor connected in series with each other. The feedback means 23 of the second stage 20 can consist of a single capacitor, a capacitor connected in series with a resistor, or two branches connected with each other in parallel; the first branch is defined by a single capacitor or a capacitor series connected with a resistor and the second branch is defined by a single resistor or a resistor series connected with a capacitor.

10

The third stage 30 is feedbacked through resistor 33. A fourth stage 40 has a fourth opamp 41, a first resistor 42 and a second resistor 43; the first resistor 42 is connected between the inverting input 41a and the ground, while the second resistor 43 is connected between the inverting input 41a and the output 41c of the fourth opamp 41; the noninverting input 41b of the fourth opamp 41 is directly connected with the inverting input 31a of the third opamp 31.

20

In the diagrams in Figs. 29 and 31 a secondary resistor 62 is connected between the inverting input 21a of the second opamp 21 and a fixed potential node, preferably a grounded node; in the diagrams of Figs. 30 and 31, a main resistor 60 is connected between the inverting

25

input 11a of the first opamp 11 and a fixed potential node, preferably a grounded node.

In the circuit in Fig. 29 a direct connection 203 is
5 interposed between the inverting input 11a of the first opamp 11 and the noninverting input 31b of the third opamp 31, while the noninverting input 11b of the first opamp 11 is grounded; the output 41c of the fourth opamp 41 is directly connected with the noninverting
10 input 21b of the second opamp 21.

In the circuit in Fig. 30 the output 41c of the fourth opamp 41 is connected with the noninverting inputs 11b, 21b of the first and second operational amplifiers 11, 21 and the noninverting input 31b of the third opamp 31
15 is grounded.

In the circuit in Fig. 31 a direct connection 204 connects the inverting input 11a of the first opamp 11
20 with the noninverting input 21b of the second opamp 21, while the output 41c of the fourth opamp 41 is connected with the noninverting input 11b of the first opamp 11; the noninverting input 31b of the third opamp 31 is grounded.

With reference to the circuits in Figs. 29-31, in relation to the input signal V_s , the output 11e of the first opamp 11 is a 180° out of phase band pass output, the output 21e of the second opamp 21 is a 90° out of phase low pass output, and the output 31e of the third opamp 31 is a 90° out of phase low pass output. The diagram in Fig. 22 shows a further embodiment of filter 1.

10 The feedback means 13 of the first stage 10 can consist of a single capacitor or a capacitor in series with a resistor, and the feedback means 23 of the second stage 20 can consist of a single capacitor or a capacitor in series with a resistor, the third stage 30 is
15 feedbacked with the resistor 33.

A fourth stage 40 has a fourth opamp 41, a first resistor 42 connected between the inverting input 41a of the fourth opamp 41 and the output 21e of the second
20 opamp 21 and a second resistor 43 connected between the inverting input 41a and the output 41e of the fourth opamp 41.

A feedback resistor 206 has a first end 206a connected
25 with the output 11e of the first opamp 11, and a second

~~end 206b connected with the inverting input 11a of the
first opamp 11 or the noninverting input 31a of the
third opamp 31; the noninverting input 31b of the third
opamp 31 is grounded.~~

5

~~A main resistor 60 is connected between the inverting
input 11a of the first opamp 11 and a fixed potential
node, preferably a grounded node, and a secondary
resistor 62 is connected between the inverting input
10 21a of the second opamp 21 and a fixed potential node,
preferably a grounded node.~~

~~The circuit in Fig. 22 has two distinct configurations,
depending on the position ("A" or "B") taken by the
15 switches therein present.~~

~~In configuration "A" a direct connection 83 connects
the noninverting input 11b of the first opamp 11 with
the inverting input 41a of the fourth opamp 41 and a
20 direct connection 204 connects the inverting input 11a
of the first opamp 11 with the noninverting input 21b
of the second opamp 21; in addition, the noninverting
input 41b of the fourth opamp 41 is directly connected
with the inverting input 31a of the third opamp 31.~~

25

In configuration "B", the inverting input 11a of the first opamp 11 is connected with the noninverting input 41b of the fourth opamp 41, the noninverting input 11b of the first opamp 11 is grounded, and a direct
5 connection 86 connects the noninverting input 21b of the second opamp 21 with the inverting input 41a of the fourth opamp 41.

With reference to the circuit in Fig. 22, in relation
10 to the input signal V_s , the output 11c of the first opamp 11 is a 180° out of phase band pass output, the output 21c of the second opamp 21 is a 90° out of phase low pass output, the output 31c of the third opamp 31 is a 90° out of phase low pass output, and the
15 output 41c is a 90° out of phase low pass output.

The circuit in Fig. 21 shows another embodiment of filter 1.

20 The feedback means 13 of the first stage 10 can consist either of a single capacitor or a capacitor in series with a resistor, the feedback means 23 of the second stage 20 can consist either of a single capacitor or a capacitor in series with a resistor and the third stage
25 30 is feedbacked by means of resistor 33.

~~A direct connection 204 is interposed between the
inverting input 11a of the first opamp 11 and the
noninverting input 21b of the second opamp 21, while
5 the noninverting input 11b of the first opamp 11 is
grounded.~~

~~A secondary resistor 62 is connected between the
inverting input 21a of the second opamp 21 and the
10 ground; also provided is an auxiliary network 95
comprising a first resistor 96 and a second resistor
97. The first resistor 96 is connected between the
output 11c of the first opamp 11 and the noninverting
input 31b of the third opamp 31, and the second
15 resistor 97 has a first end 97a connected with the
noninverting input 31b of the third opamp 31 and a
second end 97b connected to either the ground or the
inverting input 21a of the second opamp 21.~~

~~20 With reference to the diagram in Fig. 21, in relation
to the input signal V_s , the output 11c of the first
opamp 11 is a 180° out of phase band pass output, the
output 21c of the second opamp 21 is a 90° out of
phase low pass output and the output 31c of the third
25 opamp 31 is a 90° out of phase low pass output.~~

~~The diagrams in Figs. 52-54 show further embodiments of filter 1.~~

5 ~~The feedback means 13 of the first stage 10 can consist of a single capacitor or a capacitor series connected with a resistor; the feedback means 33 of the third stage 30 can consist of a single capacitor or a capacitor series connected with a resistor.~~

10

~~In addition, as an alternative, the feedback means 33 of the third stage 30 can comprise two parallel-connected branches; a first branch is defined by a single capacitor or a capacitor series connected with a resistor and a second branch is defined by a single resistor or a resistor connected in series with a capacitor.~~

~~Also provided is a fourth stage 40 having a fourth~~
20 ~~opamp 41, a first resistor 42 and a second resistor 43; the noninverting input 41b of the fourth opamp 41 is connected to the output 21c of the second opamp 21 and the output 41c of the fourth opamp 41 is connected with the second end 32b of the first resistor 32 of the~~
25 ~~third stage 30.~~

The first resistor 42 of the fourth stage 40 is
connected between the inverting input 41a of the fourth
opamp 41 and the output 11c of the first opamp 11; the
5 second resistor 43 of the fourth stage 40 is connected
between the inverting input 41a and the output 41c of
the fourth opamp 41; the second resistor 23 of the
second stage 20 is connected between the inverting
input 21a of the second opamp 21 and the output 41c of
10 the fourth opamp 41.

A feedback resistor 114 has a first end 114a connected
with the output 11c of the first opamp 11 or the output
41c of the fourth opamp 41 and a second end 114b
15 connected with the inverting input 11a of the first
opamp 11.

In the circuits in Figs. 52 and 53, a secondary
resistor 62 is connected between the inverting input
20 21a of the second opamp 21 and a fixed potential node,
preferably a grounded node; in the circuit in Fig. 54 a
main resistor 60 is connected between the inverting
input 11a of the first opamp 11 and a fixed potential
node, preferably a grounded node.

In the circuit in Fig. 52 a direct connection 204 is interposed between the inverting input 11a of the first opamp 11 and the noninverting input 21b of the second opamp 21, while the noninverting input 11b of the first
5 opamp 11 and the noninverting input 31b of the third opamp 31 are grounded.

In the circuit in Fig. 53 a direct connection 203 connects the inverting input 11a of the first opamp 11
10 with the noninverting input 31b of the third opamp 31, whereas the noninverting input 11b of the first opamp 11 is connected to the ground; a direct connection 201 is interposed between the noninverting input 21b of the second opamp 21 and the inverting input 31a of the
15 third opamp 31.

In the circuit in Fig. 54 a direct connection 207 connects the noninverting input 11b of the first opamp 11 with the inverting input 31a of the third opamp 31,
20 the noninverting inputs 21b, 31b of the second and third operational amplifiers 21, 31 are grounded.

With reference to the circuits in Figs. 52 and 54, if resistors 600 and 601 are not used, in relation to the
25 input signal V_s , the output 11c of the first opamp 11

is a 180° out of phase band pass output, the output
41c of the fourth opamp 41 is a band pass output that
is not out of phase, and the output 31c of the third
opamp 31 is a 90° out of phase low pass output, if
5 resistors 600 and 601 are used, the output 11c of the
first opamp 11 is a 180° out of phase band pass
output, the output 41c of the fourth opamp 41 is a
notch output in which the frequencies that are not
eliminated are out of phase by 180° , and the output 31c
10 of the third opamp 31 is a 90° out of phase low pass
output.

With reference to the circuit in Fig. 53, in relation
to the input signal V_s , the output 11c of the first
15 opamp 11 is a 180° out of phase band pass output, the
output 41c of the fourth opamp 41 is a band pass output
that is not out of phase, and the output 31c of the
third opamp 31 is a 90° out of phase low pass output.

20 The diagrams in Figs. 55-57 show further embodiments of
filter 1.

The feedback means 13 of the first stage 10 can consist
of a single capacitor or a capacitor in series with a
25 resistor, the feedback means 23 of the second stage 20

~~can consist of a single capacitor or a capacitor in series with a resistor.~~

~~A fourth stage 40 is provided with a fourth opamp 41, a~~
5 ~~first resistor 42 and a second resistor 43. The~~
~~noninverting input 41b of the fourth opamp 41 is~~
~~connected with the output 31c of the third opamp 31,~~
~~and the output 41c of the fourth opamp 41 is connected~~
~~with the first end 50a of the total feedback branch 50;~~
10 ~~the first resistor 42 of the fourth stage 40 is~~
~~connected between the output 21c of the second opamp 21~~
~~and the inverting input 41a of the fourth opamp 41; the~~
~~second resistor 43 of the fourth stage 40 is connected~~
~~between the inverting input 41a and the output 41c of~~
15 ~~the fourth opamp 41.~~

~~A feedback resistor 115 has a first end 115a connected~~
~~either with the inverting input 11a of the first opamp~~
~~11 or with the inverting input 31a of the third opamp~~
20 ~~31, and a second end 115b connected with the output 11c~~
~~of the first opamp 11.~~

~~In the circuits in Figs. 55 and 56, an auxiliary~~
~~resistor 61 is connected between the inverting input~~
25 ~~31a of the third opamp 31 and a fixed potential node,~~

preferably a grounded node; in the circuit in Fig. 57 a
secondary resistor 62 is connected between the
inverting input 21a of the second opamp 21 and a fixed
potential node, preferably a grounded node. In more
5 detail, in the circuit in Fig. 55 the noninverting
inputs 11b, 21b of the first and second operational
amplifiers 11, 21 are grounded and a direct connection
212 connects the inverting input 21a of the second
opamp 21 to the noninverting input 31b of the third
10 opamp 31.

In the diagram in Fig. 56, a direct connection 203
connects the inverting input 11a of the first opamp 11
with the noninverting input 31b of the third opamp 31,
15 and a direct connection 107 connects the noninverting
input 11b of the first opamp 11 to the inverting input
21a of the second opamp 21; the noninverting input 21b
of the second opamp 21 is grounded.

20 In the diagram in Fig. 57 a direct connection 204
connects the inverting input 11a of the first opamp 11
with the noninverting input 21b of the second opamp 21,
while the noninverting input 11b of the first opamp 11
and the noninverting input 31b of the third opamp 31
25 are grounded.

With reference to the circuits in Figs. 55-57, in
relation to the input signal V_s , the output 11c of the
first opamp 11 is a 180° out of phase band pass
5 output, the output 21c of the second opamp 21 is a 90°
out of phase low pass output, and the output 41c of the
fourth opamp 41 is a 90° out of phase low pass output.

The diagrams in Figs. 58-60 show further embodiments of
10 filter 1.

The feedback means 23 of the second stage 20 preferably
consists of a first branch comprising a single
capacitor or a capacitor series connected with a
15 resistor; this branch can be parallel connected to a
second branch defined by a resistor in series with a
capacitor; the feedback means 33 of the third stage 30
consists of a single capacitor or a capacitor in series
with a resistor.

20

Alternatively, the feedback means 23 of the second
stage 20 is defined by a single capacitor or a
capacitor in series with a resistor, while the feedback
means 33 of the third stage 30 consists of two
25 parallel connected branches; the first branch comprises

~~a single capacitor or a capacitor in series with a resistor and the second branch comprises a capacitor and a resistor connected in series.~~

5 ~~Also provided is a fourth stage 40 connected between the first and second stages 10, 20; the fourth stage 40 is provided with a fourth opamp 41, a first resistor 42, and a second resistor 43. The noninverting input 41b of the fourth opamp 41 is connected with the output~~
10 ~~11c of the first opamp 11 and the output 41c of the fourth opamp 41 is connected with the second end 22b of the first resistor 22 of the second stage 20; the first resistor 42 of the fourth stage 40 is connected between the inverting input 41a of the fourth opamp 41 and the~~
15 ~~output 31c of the third opamp 31; the second resistor 43 of the fourth stage 40 is connected between the inverting input 41a and the output 41c of the fourth opamp 41.~~

20 ~~The second end 13b of the second resistor 13 of the first stage 10 is connected with the output 41c of the fourth opamp 41; a feedback resistor 116 can be connected between the output 41c of the fourth opamp 41 and the inverting input 31a of the third opamp 31. A~~
25 ~~feedback resistor 117 can be interposed in circuit~~

between the inverting input 11a of the first opamp 11
and the output 21c of the second opamp 21.

In the circuits of Figs. 58 and 60 a feedback resistor
5 120 is connected between the noninverting input 11b of
the first opamp 11 and the output 21c of the second
opamp 21. In the circuits of Figs. 58 and 59, a main
resistor 60 is connected between the inverting input
11a of the first opamp 11 and a fixed potential node,
10 preferably a grounded node; in the circuit in Fig. 60
an auxiliary resistor 61 is connected between the
inverting input 31a of the third opamp 31 and a fixed
potential node, preferably a grounded node.

15 In more detail, in the circuit in Fig. 58 a connecting
branch 118 connects the noninverting input 11b of the
first opamp 11 with the inverting input 31a of the
third opamp 31; this connecting branch 118 can be a
short circuit 207, or a resistor 119; the noninverting
20 inputs 21b, 31b of the second and third operational
amplifiers 21, 31 are grounded.

In the circuit in Fig. 59 a direct connection 107 is
interposed between the noninverting input 11b of the
first opamp 11 and the inverting input 21a of the
25 second opamp 21; a direct connection 201 connects the

~~input 21b of the second opamp 21 to the inverting input
31a of the third opamp 31, while the noninverting input
31b of the third opamp 31 is grounded.~~

5 ~~In addition, the feedback means 23 of the second stage
20 in an alternative embodiment may comprise a resistor
connected in parallel to a branch comprising either a
single capacitor or a capacitor in series with a
resistor; the feedback means 33 of the third stage 30
10 being defined by a single capacitor or a capacitor in
series with a resistor. With reference to this
alternative embodiment, a feedback resistor 121 is
connected between the output 31c of the third opamp 31
and the inverting input 21a of the second opamp 21.~~

15

~~In the circuit in Fig. 60 a connecting branch 123
connects the noninverting input 11b of the first opamp
11 and the ground; this branch 123 can consist either
of a short circuit or of a resistor 124. A direct
20 connection 212 connects the inverting input 21a of the
second opamp 21 with the noninverting input 31b of the
third opamp 31, while the noninverting input 21b of the
second opamp 21 is connected to the ground.~~

As regards the circuits in Figs. 58-60, in relation to
the input signal V_s , the output 41c of the fourth opamp
41 is a 90° out of phase high pass output, the output
21c of the second opamp 21 is a band pass output not
5 out of phase, and the output 31c of the third opamp 31
is a 90° out of phase low pass output.

The diagram in Fig. 61 shows a further embodiment of
filter 1.

10

The feedback means 13 of the first stage 10 can consist
of a single capacitor or a capacitor series connected
with a resistor; the feedback means 33 of the third
stage 30 can consist of a single capacitor or a
15 capacitor in series with a resistor.

Alternatively, the feedback means 33 of the third stage
30 can comprise two branches connected in parallel; a
first branch being defined by a single capacitor or a
20 capacitor in series with a resistor and a second branch
being defined by a single resistor or a resistor in
series with a capacitor.

The second stage 20 is feedbacked by resistor 23. A
25 feedback resistor 74 has a first end 74a connected with

~~the inverting input 11a of the first opamp 11 and a
second end 74b connected with the output 11c of the
first opamp 11 or the output 21c of the second opamp
21, a main resistor 60 is connected between the
5 inverting input 11a of the first opamp 11 and a fixed-
potential node, preferably a grounded node, and an
auxiliary resistor 61 is connected between the
inverting input 31a of the third opamp 31 and a fixed-
potential node, preferably a grounded node.~~

10

~~Also provided is a fourth stage 40 comprising a fourth
opamp 41, a first resistor 42 and a second resistor 43;
the output 41c of the fourth opamp 41 is directly
connected (connection 214) to the noninverting input
15 11b of the first opamp 11. The first resistor 42 of
the fourth stage 40 is connected between the inverting
input 41a of the fourth opamp 41 and the ground; the
second resistor 43 of the fourth stage 40 is connected
between the inverting input 41a and the output 41c of
20 the fourth opamp 41. A direct connection 212 connects
the inverting input 21a of the second opamp 21 with the
noninverting input 31b of the third opamp 31; the
noninverting input 41b of the fourth opamp 41 is
connected with the inverting input 31a of the third~~

opamp 31, while the noninverting input 21b of the
second opamp 21 is grounded.

With reference to the circuit in Fig. 61, if resistors
5 600 and 601 are not used, in relation to the input
signal V_s , the output 11c of the first opamp 11 is a
-180° out of phase band pass output, the output 21c of
the second opamp 21 is a band pass output that is not
out of phase, and the output 31c of the third opamp 31
10 is a 90° out of phase low pass output; if resistors 600
and 601 are used, the output 11c of the first opamp 11
is a -180° out of phase band pass output, the output
21c of the second opamp 21 is a notch output in which
the frequencies that are not eliminated are 180° out of
15 phase, and the output 31c of the third opamp 31 is a
90° out of phase low pass output.

Fig. 62 shows a further embodiment of filter 1. The
feedback means 13 of the first stage 10 can consist of
20 a single capacitor or a capacitor in series with a
resistor; likewise, the feedback means 23 of the second
stage 20 can consist of a single capacitor or a
capacitor in series with a resistor; the third stage 30
is feedbacked through resistor 33.

A feedback resistor 102 has a first end 102a connected with the inverting input 11a of the first opamp 11 or the inverting input 31a of the third opamp 31, and a second end 102b connected with the output 11c of the first opamp 11; a main resistor 60 is connected between the inverting input 11a of the first opamp 11 and a fixed potential node, preferably a grounded node, and a secondary resistor 62 is connected between the inverting input 21a of the second opamp 21 and a fixed potential node, preferably a grounded node.

A fourth stage 40 is provided with a fourth opamp 41, a first resistor 42 and a second resistor 43, the latter being connected between the inverting input 41a and the output 41c of the fourth opamp 41; the first resistor 42 is connected between the inverting input 41a of the fourth opamp 41 and the ground. The noninverting input 41b of the fourth opamp 41 is connected to the inverting input 11a of the first opamp 11, and the output 41c of the fourth opamp 41 is connected, preferably in a direct manner (connection 215), to the noninverting input 21b of the second opamp 21. A direct connection 207 connects the noninverting input 11b of the first opamp 11 with the inverting input 31a of the

~~third opamp 31, the noninverting input 31b of the third
opamp 31 is grounded.~~

~~With reference to the diagram in Fig. 62, in relation
5 to the input signal V_s , the output 11c of the first
opamp 11 is a 180° out of phase band pass output, the
output 21c of the second opamp 21 is a 90° out of
phase low pass output, and the output 31c of the third
opamp 31 is a 90° out of phase low pass output.~~

10

~~The circuit in Fig. 63 shows a further embodiment of
filter 1.~~

~~The feedback means 23 of the second stage 20 preferably
15 consists of a first branch comprising either a single
capacitor or a capacitor series connected with a
resistor; this branch can be connected in parallel to a
second branch defined by a single resistor or a
resistor in series with a capacitor; the feedback means
20 33 of the third stage 30 consists of a single capacitor
or a capacitor in series with a resistor.~~

~~Alternatively, the feedback means 23 of the second
stage 20 is defined by a single capacitor or a
25 capacitor in series with a resistor, while the feedback~~

means 33 of the third stage 30 consists of two branches
connected in parallel; the first branch comprises a
single capacitor or a capacitor in series with a
resistor and the second branch comprises a capacitor
5 and a resistor in series with each other.

A feedback resistor 109 is connected between the output
31c of the third opamp 31 and the inverting input 21a
of the second opamp 21; with insertion of such a
10 resistor 109 it is more desirable for the feedback
means 23 of the second stage 20 to be defined by, as
above specified, a resistor connected in parallel with
a branch comprising a single capacitor or a capacitor
in series with a resistor.

15

The first stage 10 is feedbacked by means of resistor
13. A feedback resistor 102 is connected between the
output 11c of the first opamp 11 and the inverting
input 31a of the third opamp 31, and a feedback
20 resistor 104 is connected between the inverting input
11a of the first opamp 11 and the output 21c of the
second opamp 21. An auxiliary resistor 61 is connected
between the inverting input 31a of the third opamp 31
and a fixed potential node, preferably a grounded node,
25 and a secondary resistor 62 is connected between the

~~inverting input 21a of the second opamp 21 and a fixed-
potential node, preferably a grounded node.~~

~~A fourth stage 40 is provided with a fourth opamp 41, a
5 first resistor 42 and a second resistor 43, the latter
being connected between the inverting input 41a and the
output 41c of the fourth opamp 41. The first resistor
42 of the fourth stage 40 is connected between the
inverting input 41a of the fourth opamp 41 and the
10 ground, while the noninverting input 41b of the fourth
opamp 41 is connected with the inverting input 21a of
the second opamp 21; the output 41c of the fourth opamp
41 is connected (connection 216) with the noninverting
input 31b of the third opamp 31. In addition, a direct
15 connection 204 is interposed between the inverting
input 11a of the first opamp 11 and the noninverting
input 21b of the second opamp 21, while the
noninverting input 11b of the first opamp 11 is
connected to the ground.~~

20

~~With reference to the circuit in Fig. 63, in relation
to the input signal V_s , the output 11c of the first
opamp 11 is a -90° out of phase high-pass output, the
output 21c of the second opamp 21 is a band-pass output~~

~~that is not out of phase, and the output 31c of the
third opamp 31 is a 90° out of phase low pass output.~~

~~The diagrams in Figs. 64-72 show further embodiments of
5 filter 1.~~

The first stage 10 comprises, in addition to the first
opamp 11, a first connecting block 13 having a first
end 13a connected with the inverting input 11a of the
10 first opamp 11, and a second end 13b; a first
connecting branch 15 has a first end 15a connected to
the second end 13b of the first connecting block 13,
and a second end 15b connected with the output 11c of
the first opamp 11. The second stage 20 comprises, in
15 addition to the second opamp 21, a second connecting
block 23 having a first end 23a connected with the
inverting input 21a of the second opamp 21 and a second
end 23b; a second connecting branch 25 has a first end
25a connected with the second end 23b of the second
20 connecting block 23 and a second end 25b connected to
the output 21c of the second opamp 21. The third stage
30 comprises, in addition to the third opamp 31, a
third connecting block 33 having a first end 33a
connected with the inverting input 31a of the third
25 opamp 31 and a second end 33b; a third connecting

branch 35 has a first end 35a connected to the second end 33b of the third connecting block 33 and a second end 35b connected to the output 31c of the third opamp 31.

5 Resistors 12 (for receiving an input signal V_s), 22
 (for connection between the output 11c of the first
 opamp 11 and the inverting input 21a of the second
 opamp 21), and 32 (for connection between the output
 21c of the second opamp 21 and the inverting input 31a
10 of the third opamp 31) can be provided.

At least one predetermined connecting branch between said first, second and third connecting branches 15, 25, 35 comprises a fourth stage 40 provided with a fourth opamp 41; the output 41c of the fourth opamp 41
15 defines the first end 15a, 25a, 35a of the predetermined connecting branch, the noninverting input 41b of the fourth opamp 41 defining the second end 15b, 25b, 35b of the predetermined connecting branch.

20 Alternatively, the second end of the predetermined connecting branch can be coincident with an end of a first resistor 42 having the other end connected to the noninverting input 41b of the fourth opamp 41. A feedback branch 91 defined by a short circuit or a

resistor 44 is connected between the inverting input 41a and the output 41c of the fourth opamp 41.

In the diagrams in Figs. ~~64-66~~25-27 the fourth stage 40
5 is included in the second connecting branch 25; the
second connecting block 23 is preferably defined by a
resistor 92. The first connecting block 13 can consist
of a single capacitor or a capacitor in series with a
resistor; the third connecting block 33 can consist of
10 a single capacitor or a capacitor in series with a
resistor.

Alternatively, the first connecting block 13 consists
of a single capacitor or a capacitor in series with a
15 resistor, whereas the third connecting block 33
comprises two branches connected in parallel; a first
branch being defined by a single capacitor or a
capacitor in series with a resistor, and a second
branch being defined by a single resistor or a resistor
20 in series with a capacitor.

A feedback resistor 74 has a first end 74a connected
with the inverting input 11a of the first opamp 11, and
a second end 74b connected either to the output 11c of

the first opamp 11 or to the second end 25b of the second connecting branch 25.

In the diagrams in Figs. 64-25 and 6526 a main resistor
5 60 is connected between the inverting input 11a of the first opamp 11 and a fixed-potential node, preferably a grounded node; in the diagrams in Figs. 6425 and 6627, an auxiliary resistor 61 is connected between the inverting input 31a of the third opamp 31 and a fixed-
10 potential node, preferably a grounded node. The first and third connecting branches 15, 35 are short circuits.

In the circuit in Fig. 6425 a direct connection 207 connects the noninverting input 11b of the first opamp
15 11 to the inverting input 31a of the third opamp 31; a direct connection 212 connects the inverting input 21a of the second opamp 21 to the noninverting input 31b of the third opamp 31. The noninverting input 21b of the second opamp 21 is grounded, and the second end 25b of
20 the second connecting branch 25 is defined by the noninverting input 41b of the fourth opamp 41.

In the circuit in Fig. 6526, a second resistor 43 can be interposed between the noninverting input 41b and
25 the output 41c of the fourth opamp 41; a direct

connection 107 connects the noninverting input 11b of the first opamp 11 with the inverting input 21a of the second opamp 21. A direct connection 201 connects the noninverting input 21b of the second opamp 21 with the
5 inverting input 31a of the third opamp 31; the noninverting input 31b of the third opamp 31 is grounded and the noninverting input 41b of the fourth opamp 41 can be connected to the second end 25b of the second connecting branch 25, through the first resistor
10 42.

In the circuit in Fig. 6627, with reference to the fourth stage 40, a first resistor 42 can be interposed between the noninverting input 41b of the fourth opamp
15 41 and the second end 25b of the second connecting branch 25, and a second resistor 43 can be connected between the noninverting input 41b and the output 41c of the fourth opamp 41. A direct connection 107 is interposed between the noninverting input 11b of the
20 first opamp 11 and the inverting input 21a of the second opamp 21; a direct connection 212 connects the inverting input 21a of the second opamp 21 to the noninverting input 31b of the third opamp 31, while the noninverting input 21b of the second opamp 21 is
25 connected to the ground.

With reference to the circuits in Figs. ~~64-66~~25-27, if resistors 600 and 601 are not used, in relation to the input signal V_s , the output 11c of the first opamp 11 is a -180° out of phase band-pass output, the output 21c of the second opamp 21 is a band-pass output that is not out of phase, the output 31c of the third opamp 31 is a 90° out of phase low-pass output; if on the contrary resistors 600 and 601 are used, the output 11c of the first opamp 11 is a -180° out of phase band-pass output, the output 21c of the second opamp 21 is a notch output in which the frequencies that are not eliminated are out of phase by 180° , and the output 31c of the third opamp 31 is a 90° out of phase low-pass output.

In the diagrams in Figs. ~~67-69~~. 28, the fourth stage 40 is included in the third connecting branch 35; the third connecting block 33 is preferably defined by a resistor 92. The first connecting block 13 can consist of a single capacitor or a capacitor in series with a resistor; alternatively, said first block may consist of a resistor connected in parallel to a branch comprising a single capacitor or a capacitor in series with a resistor. The second connecting block 23 can be

defined by a single capacitor or a capacitor connected in series with the inverting input 31a of the third opamp 31.

5 ~~In the circuits in Figs. 67 and 69, a~~ main resistor 60 is connected between the inverting input 11a of the first opamp 11 and a fixed-potential node, preferably a grounded node; ~~in the circuits in Figs. 67 and 68, a~~
secondary resistor 62 is connected between the
10 ~~inverting input 21a of the second opamp 21 and a fixed-~~
~~potential node, preferably a grounded node.~~

~~In more detail, in the circuit in Fig. 67 a direct~~
~~connection 204 connects the inverting input 11a of the~~
15 ~~first opamp 11 to the noninverting input 21b of the~~
~~second opamp 21 and a~~ direct connection 207 connects the noninverting input 11b of the first opamp 11 to the inverting input 31a of the third opamp 31, and a direct
connection 201 connects the noninverting input 21b of
20 the second opamp 21 to the inverting input 31a of the
third opamp 31; the noninverting input 31b of the third opamp 31 is grounded. ~~The second end 35b of the third~~
~~connecting branch 35 is defined by the noninverting~~
~~input 41b~~ The noninverting input 41b of the fourth
25 opamp 41 can be connected to the second end 35b of the

third connecting branch 35, through a first resistor
42; a second resistor 43 can be connected between the
noninverting input 41b and the output 41c of the fourth
opamp 41.

5

:

~~In the circuit in Fig. 68, a direct connection 203~~
~~connects the inverting input 11a of the first opamp 11~~
~~to the noninverting input 31b of the third opamp 31 and~~
~~a direct connection 201 connects the noninverting input~~
10 ~~21b of the second opamp 21 to the inverting input 31a~~
~~of the third opamp 31; the noninverting input 11b of~~
~~the first opamp 11 is connected to the ground. The~~
~~noninverting input 41b of the fourth opamp 41 can be~~
~~connected to the second end 35b of the third connecting~~
15 ~~branch 35, through a first resistor 42; a second~~
~~resistor 43 can be connected between the noninverting~~
~~input 41b and the output 41c of the fourth opamp 41.~~

~~In the circuit in Fig. 69, a direct connection 207~~
20 ~~connects the input 11b of the first opamp 11 to the~~
~~inverting input 31a of the third opamp 31, and a direct~~
~~connection 201 connects the noninverting input 21b of~~
~~the second opamp 21 to the inverting input 31a of the~~
~~third opamp 31; the noninverting input 31b of the third~~
25 ~~opamp 31 is grounded. The noninverting input 41b of~~

~~the fourth opamp 41 can be connected to the second end
35b of the third connecting branch 35, through a first
resistor 42; a second resistor 43 can be connected
between the noninverting input 41b and the output 41c
5 of the fourth opamp 41.~~

~~With reference to the circuit in Figs. 67-69, in
relation to the input signal V_s , the output 11c of the
first opamp 11 is a -180° out of phase band-pass
10 output, the output 21c of the second opamp 21 is a -90°
out of phase low-pass output, and the output 31c of the
third opamp 31 is a 90° out of phase low-pass output.~~

~~In the circuits in Figs. 70-72~~With reference to the
15 circuit in Fig. 28, in relation to the input signal V_s ,
the output 11c of the first opamp 11 is a -180° out of
phase band-pass output, the output 21c of the second
opamp 21 is a -90° out of phase low-pass output, and
the output 31c of the third opamp 31 is a 90° out of
20 phase low-pass output.

In the circuits in Fig. 29, the fourth stage 40 is
included in the first connecting branch 15; the first
connecting block 13 is preferably defined by a resistor
92. The second connecting block 23 can consist of two
25 branches connected in parallel; the first branch being

defined either by a single capacitor or a capacitor in series with a resistor and the second branch being defined by a single resistor or a resistor in series with a capacitor; the third connecting block 33 is
5 defined by a single capacitor or a capacitor in series with a resistor.

Alternatively, the second connecting block 23 can consist of a single capacitor or a capacitor in series
10 with a resistor, while the third connecting block 33 can comprise two parallel-connected branches; the first branch being defined by a single capacitor or a capacitor in series with a resistor, and the second branch being defined by a resistor connected in series
15 with a capacitor.

In a further alternative embodiment the feedback means 23, 33 are each defined by a single capacitor or a capacitor in series with a resistor, without mutual
20 links. The second and third connecting branches 25, 35 are defined by corresponding short circuits. Also provided is a feedback resistor 29 connected between the inverting input 11a of the first opamp 11 and the output 21c of the second opamp 21; a feedback resistor
25 102 is connected between the output 11c of the first

opamp 11 and the inverting input 31a of the third opamp 31. A feedback resistor 109 is connected between the output 31c of the third opamp 31 and the inverting input 21a of the second opamp 21; with reference to use
5 of this resistor 109, it is more desirable for the feedback means 23 of the second stage 20 to be, alternatively, defined by a resistor connected in parallel with a branch comprising a single capacitor or a capacitor in series with a resistor, while the
10 feedback means 33 of the third stage 30 is defined by a single capacitor or a capacitor in series with a resistor.

~~In the circuits in Figs. 70 and 71 an~~ auxiliary
15 resistor 61 is connected between the inverting input 31a of the third opamp 31 and a fixed-potential node, preferably a grounded node; ~~in the circuits in Figs. 70 and 72 a secondary resistor 62 is connected between the inverting input 21a of the second opamp 21 and a~~
20 ~~fixed potential node, preferably a grounded node.~~

~~In more detail, in the~~ In the same circuit in Fig. 70 ~~a direct connection 204 connects the inverting input 11a of the first opamp 11 to the noninverting input 21b of~~
25 ~~the second opamp 21, and a direct connection 212 is~~

~~interposed between the inverting input 21a of the
second opamp 21 and the noninverting input 31b of the
third opamp 31. The second end 15b of the first
connecting branch 15 is defined by the noninverting
5 input 41b of the fourth opamp 41; the noninverting
input 11b of the first opamp 11 is connected to the
ground.~~

~~In the circuit in Fig. 71~~29, a direct connection 203
10 connects the inverting input 11a of the first opamp 11
to the noninverting input 31b of the third opamp 31; a
direct connection 107 connects the noninverting input
11b of the first opamp 11 to the inverting input 21a of
the second opamp 21. The second end 15b of the first
15 connecting branch 15 is defined either by the
noninverting input 41b of the fourth opamp 41 or by an
end of a first resistor 42 the other end of which is
connected with the noninverting input 41b of the fourth
opamp 41; a second resistor 43 can be connected between
20 the noninverting input 41b and the output 41c of the
fourth opamp 41. In addition, the noninverting input
21b of the second opamp 21 is connected to the ground.

~~In the circuit in Fig. 72 a direct connection 203
25 connects the inverting input 11a of the first opamp 11~~

to the noninverting input 31b of the third opamp 31, a
direct connection 204 is interposed between the
inverting input 11a of the first opamp 11 and the
noninverting input 21b of the second opamp 21. The
5 second end 15b of the first connecting branch 15 is
defined by the noninverting input 41b of the fourth
opamp 41 or by an end of a first resistor 42 the other
end of which is connected with the noninverting input
41b of the fourth opamp 41, a second resistor 43 can be
10 connected between the noninverting input 41b and the
output 41c of the fourth opamp 41. In addition, the
noninverting input 11b of the first opamp 11 is
connected to the ground.

15 It is to be noted that the diagrams in Figs. ~~64-72~~25-29
can be modified, in particular as regards the mode of
use of the fourth stage 40 for feedback of a single
stage 10, 20 or 30; in Figs. ~~74-76~~35-37 alternative
embodiments of this feedback are shown.

20

A first operational amplifier is generally denoted at
401 and a second operational amplifier is denoted at
501; in the following it will be specified to which of
the operational amplifiers 11, 21, 31, 41 they can
25 correspond.

The first opamp 401 has an inverting input 401a, a noninverting input 401b and an output 401c; connected to the inverting input 401a is a resistor 402 a first
5 end 402a of which is connected with the inverting input 401a and a second end 402b of which is set to receive an input signal "Vin" from a general stage located upstream.

10 The second operational amplifier 501 too has an inverting input 501a, a noninverting input 501b and an output 501c; the noninverting input 501b is connected to the output 401c of the first opamp 401 through a connecting branch 396 that can be defined either by a
15 direct connection or by a first resistor 502. The inverting input 501a and the output 501c of the second opamp 501 are connected with each other by means of a feedback branch 395 defined by a second resistor 503 or a direct connection.

20

In the diagram in Fig. 7435, in accordance with the present invention, the simplest case is shown in which both the connecting branch 396 and the feedback branch 395 are defined by a direct connection; thus the second

opamp 501 appears to have the configuration of a buffer.

In the diagram in Fig. 7536 the connecting branch 396
5 is defined by said first resistor —502, the feedback
branch 395 is preferably a direct connection whereas a
connecting resistor 504 is provided to be in particular
connected between the noninverting input 501b and the
output 501c of the second opamp 501.

10

In Fig. 7637 the connecting branch 396 is defined by a
direct connection, the feedback branch 395 is in
particular defined by the second resistor 503, whereas
the connecting resistor 504 is provided to be connected
15 between the output 401c of the first opamp 401 and the
inverting input 501a of the second opamp 501.

A connecting block 450 connects the output 501c of the
second opamp to the inverting input 401a of the first
20 opamp 401 and can consist of a single resistor, a
single capacitor, or a resistor and a capacitor
connected in series with each other. Alternatively, the
circuit structure of the connecting block 450 can be
more complicated and can comprise two parallel-
25 connected branches; the first branch being defined by a

single resistor or a resistor in series with a capacitor and the second branch comprising a single capacitor or a capacitor in series with a resistor.

- 5 The active stage shown in Fig. 7435 can be used in the diagrams of Figs. ~~64-72~~25-29 as the input stage, i.e. the first opamp 401 is inserted in place of the first opamp 11 in the stated figures, and the second opamp 501 corresponds to the fourth opamp 41 in said figures.
- 10 The active stage shown in Fig. 7435 can be also used, in the same diagrams (~~64-72~~Figs. 25-29), as the intermediate stage, i.e. the first opamp 401 is inserted in place of the second opamp 21 in the stated figures, and the second opamp 501 corresponds to the
- 15 fourth opamp 41 in these figures. The active stage shown in Fig. 7435 can further be used in ~~the said~~ diagrams ~~in~~ (Figs. ~~64-72~~25-29) as the final stage, i.e. the first opamp 401 is inserted in place of the third opamp 31 in the stated figures, and the second
- 20 opamp 501 corresponds to the fourth opamp 41 in said figures.

The active stage shown in Fig. 7536 can be used in the diagrams of said Figs. ~~64-72~~25-29 as the input stage,

25 i.e. the first opamp 401 is inserted in place of the

first opamp 11 in the stated figures, and the second opamp 501 corresponds to the fourth opamp 41 in said figures. The active stage shown in Fig. 7536 can also be used in the diagrams of the same figures (~~64-72~~25-29) as the intermediate stage, i.e. the first opamp 401 is inserted in place of the second opamp 21 in the stated figures, and the second opamp 501 corresponds to the fourth opamp 41 in said figures. The active stage shown in Fig. 7536 can further be used as the final stage, i.e. the first opamp 401 is inserted in place of the third opamp 31 in the stated figures (~~64-72~~25-29), and the second opamp 501 corresponds to the fourth opamp 41 in said figures.

15 The active stage shown in Fig. 7637 can be used in the diagrams of the same figures ~~64-72~~25-29 as the input stage, i.e. the first opamp 401 is inserted in place of the first opamp 11 in the stated figures, and the second opamp 501 corresponds to the fourth opamp 41 in said figures. The active stage shown in Fig. 7637 can be also used as the intermediate stage, i.e. the first opamp 410 is inserted in place of the second opamp 21 in the stated figures (~~64-72~~25-29) and the second opamp 501 corresponds to the fourth opamp 41 in said figures.

25 The active stage shown in Fig. 7637 can further be used

as the final stage, i.e. the first opamp 401 is inserted in place of the third opamp 31 in the stated figures (~~64-7225-29~~), and the second opamp 501 corresponds to the fourth opamp 41 in said figures.

5

It is to be noted that shown in Figs. ~~76a-76b~~37a-37b are the possible configurations that the connecting block 450 can take; these figures can also refer to the feedback means or the connecting blocks 13, 23, 33 of
10 the previously described figures.

It is also to be noted that the fourth stage 40, with reference to the diagrams in Figs. ~~64-7225-29~~, can take the configuration shown in Fig. ~~80~~31 in which a
15 resistor 44 is connected between the inverting input 41a and the output 41c of the fourth opamp 41, and a resistor 43 has an end connected to the inverting input 41a of the fourth opamp 41; the noninverting input 41b of the fourth opamp 41 is connected to the opposite end
20 of resistor 43.

~~The diagrams in Figs. 77 and 78 show further
embodiments of filter 1.~~

~~In the circuit in Fig. 77 the first stage 10 is~~
~~feedbacked through resistor 13, whereas the second~~
~~stage 20 is feedbacked by means of two branches~~
~~connected in parallel with each other; the first branch~~
5 ~~is defined by a single capacitor or a capacitor in~~
~~series with a resistor and the second branch is defined~~
~~by a resistor in series with a capacitor; the third~~
~~stage 30 is feedbacked by means of a single capacitor~~
~~or a capacitor in series with a resistor~~ 30 shows an
10 amplifying stage comprising two operational amplifiers
401, 501 that can be used in filter 1. The first opamp
401 is associated with a first resistor 402 having a
first end 402a connected with the inverting input 401a
of the first opamp 401 and a second end 402b set to
15 receive an input signal V_s ; a second resistor 403 is
connected between the inverting input 401a and the
output 401c of the first opamp 401.

~~Alternatively, the second stage 20 can be feedbacked~~
20 ~~through a single capacitor or a capacitor in series~~
~~with a resistor, whereas the third stage 30 is~~
~~feedbacked through two parallel connected branches; the~~
~~first branch is defined by a single capacitor or a~~
~~capacitor in series with a resistor and the second~~

~~branch is defined by a resistor connected in series
with a capacitor.~~

~~As a further alternative embodiment, both the first and
5 second stages 20, 30 can be feedbacked with a single
capacitor or with a capacitor in series with a
resistor; in this case a feedback branch 101 preferably
defined by a resistor 102 is provided to be connected
between the output 11c of the first opamp 11 and the
10 inverting input 31a of the third opamp 31. Still with
reference to the last mentioned alternative embodiment,
a feedback branch 103 preferably defined by a resistor
104 can be connected between the inverting input 11a of
the first opamp 11 and the output 21c of the second
15 opamp 21.~~

~~The noninverting inputs 11b, 21b of the first and
second operational amplifiers 21 are grounded; a fourth
stage 40 comprises a fourth opamp 41, a first resistor
20 42 and a second resistor 43. The first resistor 42 is
connected between the inverting input 41a of the fourth
opamp 41 and the ground, whereas the second resistor 43
is connected between the inverting input 41a and the
output 41c of the fourth opamp 41; the output 41c of~~

~~the fourth opamp 41 is connected to the noninverting input 31b of the third opamp 31.~~

~~A first connecting resistor 54 is connected between the noninverting input 41b of the fourth opamp 41 and the inverting input 21a of the second opamp 21; a second connecting resistor 59 is connected between the noninverting input 41b of the fourth opamp 41 and the inverting input 11a of the first opamp 11.~~

10

~~With further reference to the circuit in A first resistor 502 is connected between the inverting input 501a of the second opamp 501 and the output 401c of the first opamp 401; a second resistor 503 is connected~~
15 ~~between the inverting input 501a and the output 501c of the second opamp 501. A direct connection 399 connects the noninverting input 401b of the first opamp 401 to the inverting input 501a of the second opamp 501; the noninverting input 501b of the second opamp 501 is~~
20 ~~preferably connected to a fixed-potential node, in particular grounded.~~

~~Fig. 77, in relation to the input signal V_s , the output 11c of the first opamp 11 is a 90° out of phase high-pass output, the output 21c of the second opamp 21 is a~~
25 ~~band-pass output that is not out of phase and the~~

~~output 31c of the third opamp 31 is a 90° out of phase
low pass output.~~

~~In the circuit in Fig. 78 the second stage 20 is
5 feedbacked with a resistor 23, the first and third
stages 10, 30 can be feedbacked through a single
capacitor or a capacitor in series with a resistor. In
this case, filter 1 is provided with a feedback
resistor 74 having a first end 74a connected with the
10 inverting input 11a of the first opamp 11 and a second
end 74b connected to the output 11c of the first opamp
11 or to the output 21c of the second opamp 21. The
noninverting inputs 21b, 31b of the second and third
operational amplifiers 21, 31 are grounded.~~

15

~~A fourth stage 40 is provided which has a structure
similar to that described with reference to Fig. 77.
The output 41c of the fourth stage 41 is connected to
the noninverting input 11b of the first opamp 11; a
20 first resistor 42 is connected between the inverting
input 41a of the fourth opamp 41 and the ground, and a
second resistor 43 is connected between the inverting
input 41a and the output 41c of the fourth opamp 41.~~

A first connecting resistor 54 is connected between the noninverting input 41b of the fourth opamp 41 and the inverting input 21a of the second opamp 21; a second connecting resistor 58 is connected between the
5 noninverting input 41b of the fourth opamp 41 and the inverting input 31a of the third opamp 31.

With further reference to the circuit in Fig. 78, if resistors 600, 601 are not used, in relation to the
10 input V_s , the output 11c of the first opamp 11 is a 180° out of phase band pass output, the output 21 of the second opamp 21 is a band pass output that is not out of phase, and the output 31c of the third opamp 31 is a 90° out of phase low pass output; if resistors
15 600, 601 are used, the output 11c of the first opamp 11 is a 180° out of phase band pass output, the output 21c of the second opamp 21 is a notch output in which the frequencies that are not eliminated are 180° out of phase, and the output 31c of the third opamp 31 is a
20 90° out of phase low pass output.

The circuit in Fig. 79 shows a general coupling between two operational amplifiers 401 and 501 that can be used in circuit 1. The first opamp 401 is associated with a
25 first resistor 402 having a first end 402a connected

with the inverting input 401a of the first opamp 401
and a second end 402b set to receive an input signal
 V_s ; a second resistor 403 is connected between the
inverting input 401a and the output 401c of the first
5 opamp 401.

As regards the second stage 500, a first resistor 502
is connected between the inverting input 501a of the
second opamp 501 and the output 401c of the first opamp
10 401; a second resistor 503 is connected between the
inverting input 501a and the output 501c of the second
opamp 501. A direct connection 399 connects the
noninverting input 401b of the first opamp 401 to the
inverting input 501a of the second opamp 501; the
15 noninverting input 501b of the second opamp 501 is
grounded.

Fig. ~~8132~~ shows a further configuration of filter 1, in
which both the third opamp 31 and the second opamp 21
20 are connected to the first opamp 11, each of them by
means of a respective fourth amplifying stage 40. A
fourth stage 40 in fact has an input "in" connected to
the inverting input 31a of the third opamp 31, and an
output "out" connected to the noninverting input 11b of
25 the first opamp 11, through a respective resistor.

Also provided between the first and second operational amplifiers 11, 21 is a further fourth stage 40 having an input "in" connected to the inverting input 21a of the second opamp 21 and an output "out" connected to the noninverting input 11b of the first opamp, through a respective resistor.

It is to be noted that the noninverting inputs 21b, 31b of the second and third operational amplifiers 21, 31 respectively, are connected to the ground. It is also to be pointed out that the input signal Vs can be supplied, through a suitable resistor, to the inverting input 11a, 21a, 31a of one of the mentioned operational amplifiers 11, 21 and 31, depending on the required type of filtering.

Fig. 7334 shows a possible configuration of the feedback means or connecting blocks 13, 23, 33 present in the above described circuits; particularly represented are a resistor 302 and a capacitor 303 that are connected in series and define a branch 301 connected in parallel to a capacitor 300.

Example of a typical design of the filter being the
25 object of the invention

In order to verify the functional character of the invention, three different prototypes have been made and among them the one relating to the biquadratic configuration in Fig. 17(A) which has three main outputs: VoBP, VoLP1 and VoLP2, of the band-pass, low-pass and inverting low-pass types, respectively.

- Planning parameters and operation conditions of the prototype:

$$Q = 100; \quad f_o = 9.952 \text{ KHz};$$

$$|A_{voBO}| = |A_{voLP1}| = |A_{voLP2}| = A_{vo} = 1; \quad T = 27^\circ \text{C}$$

15 - **Filter measurement:** the feedback means 13 is in particular defined by a capacitor C1 and a resistor RQ in parallel to each other, the feedback means 23 is preferably defined by a capacitor C2 while the resistors 44 and 206 are not used. The simple ideal formulas of the conventional biquadratic filters has been used and the solution with equal components has been adopted.

$$C1 = C2 = C = 1 \text{ nF } (+10\%);$$

$$R22 = R32 = R33 = R51 = R = 1 / (6.28 * f_o * C) = 16 \text{ K}\Omega (+5\%);$$

$R_{60}=R_{62}=2R=32K\Omega=16K\Omega$ (+5%); $RQ=Q \cdot R=1.6M\Omega$;
 $R_{12}=RQ/A_{vo}=1.6M\Omega$;

Analytical study of the "Q" dispersion

5

In order to analytically prove the exceptional level of stability, in terms of selectivity, of the filter being the object of the invention, three histograms of the "Q" have been drawn up.


10 · The first one relates to a normal biquadratic filter, with ideal operational amplifiers.

· The second one refers to the same configuration but with real operational amplifiers ($\mu a-741$) and utilising a self-compensating solution of the invention (see Fig.


15 17(A)).

· Finally, the third histogram relates to a filter belonging to the same typology as the preceding ones, put in the same achievement conditions as the second one but with a configuration obtained with the
20 technique of the active compensation of the poles, shown in Fig. 1c.


"Q" distribution histogram of a biquadratic filter, with ideal operational amplifiers:

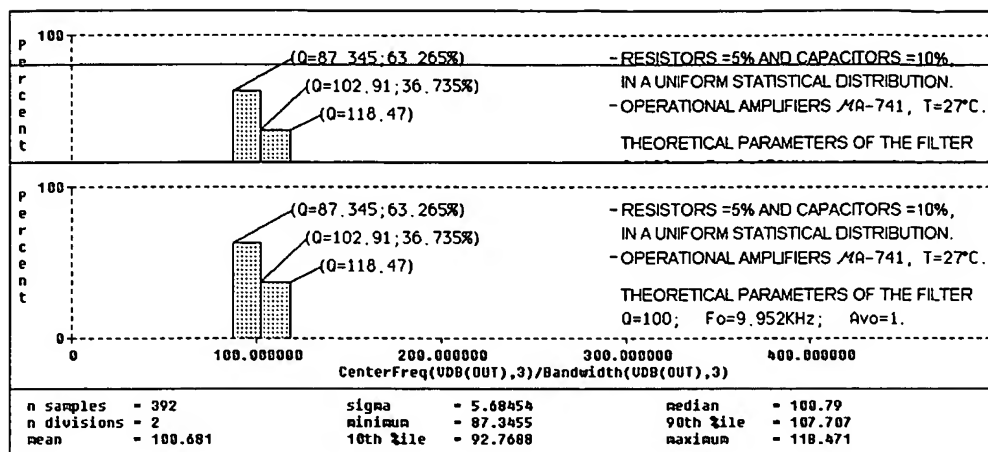

5

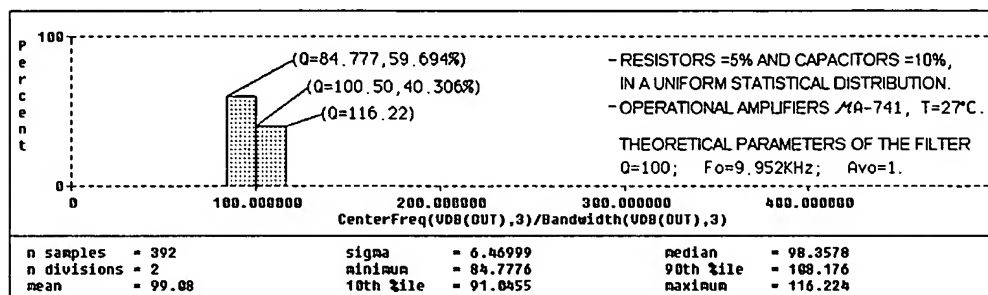

10

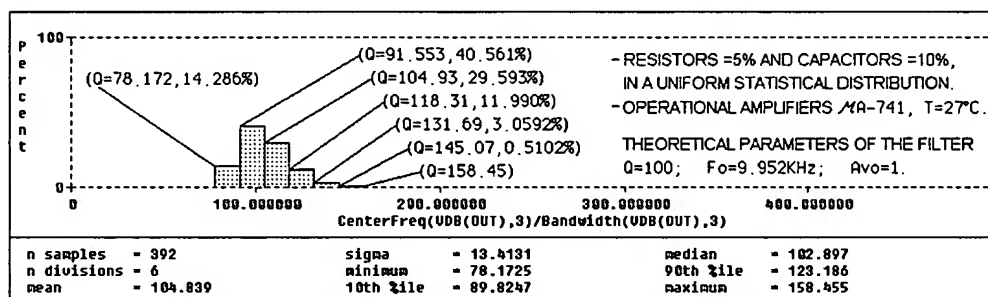

15 Analysis and interpretation of the histograms

In order to process the three histograms, the computer has carried out the same number of Monte Carlo analyses, each comprising 392 A.C. simulations, calculating many of the values that the real "Q" can take, in each of the three filters; then the computer has drawn up the statistical distribution thereof, also carrying out a mathematical-statistical analysis the results of which are reproduced herein.

By comparing the first and second histograms relating to the biquadratic filter with ideal operational amplifiers and to the object of the invention
5 respectively, the following is ascertained.

- The ideal filter: has the maximum value assumable by the "Q", equal to 118.47, with an error of +18.47%, in relation to the theoretical nominal "Q"; on the
10 contrary, to the minimum value, which is 87.345, an error of -12.655% corresponds.

- The invention: has a maximum "Q" of 116.22, with an error of +16.22%, and a minimum value the error of which corresponds to -15.222%.

- 15 · The ideal filter: has a mean of the "Q" that is equal to 100.79, to which an average error of +0.79% relative to the theoretical nominal value corresponds.

- The object of the invention: gives a mean of 98.358, with an error of -1.642%.

- 20 · The ideal filter: has a two-division histogram (by division being intended the intervals into which the histogram is divided), and the one of greater probability with 63.265% is delimited by "Q" values included between 87.345 and 102.91.

· The most frequently assumable "Q" value is equal to 100.681. The object of the invention too has a two-division histogram, which means a "Q"-variation range which is advantageously very limited. The division
5 comprising the most probable value group with 59.694% is delimited by "Q" values in the range of 84.777 and 100.50; advantageously included among them is the most recurring one, of 99.08, that is almost equal to the theoretical "Q".

10

· The "sigma" is a very important parameter stating the amount of the standard deviation taken by the Gaussian distribution of a parameter (in this case the "Q"), relative to the mean thereof; generally the smaller
15 this deviation, the more stable a device is.

· The ideal filter has a "sigma" of 5.6845 and a mean equal to 100.79; consequently it supplies a "Q" that, with a 68% probability, can take values included between 95.105 and 106.47.

20 · The object of the invention has a "sigma" equal to 6.470; taking into account the mean, the "Q" thereof is assumed to be able to have a value included between 91.888 and 104.83, still with a 68% probability.

In terms of statistical distribution, the filter with ideal operational amplifiers has an average concentration that is somewhat higher, since the "sigma" thereof is lower; however it should be taken
5 into account the fact that by increasing the value of "RQ" by 50% and decreasing the values of "R60" and "~~R62~~" by 17.2%, a "sigma" equal to 5.440 is obtained that is advantageously 4.3% lower than the ideal one.

10 The "sigma" values reproduced in this document are very precise because they are drawn from a high number of A.C. analysis (392 that is more than twice the number normally used for obtaining reliable data); however even if a potential approximate error is considered,
15 the "sigma" of the invention and that of the ideal non-operational filters would appear to be practically identical.

Afterwards, the histogram of the invention (the second
20 one) has been also compared with the one relating to the known filter (the third one). From a first analysis it is possible to see at once that the second histogram is much more performing than the third one.

25 After a more in-depth study the following is deduced:

· The filter being the object of the invention: has a maximum "Q" of 116.22 (+16.22% in comparison with the ideal value) and a minimum "Q" of 84.778 (-15.222%).
The filter in Fig. 1c, on the contrary, is submitted to
5 a maximum "Q" of 158.45 (+58.45%). The minimum "Q" is equal to 78.172 and consequently the maximum error by defect is of -21.827%. The whole range delimited by the maximum and minimum values of the "Q" is equal to 80.282 that disadvantageously overcomes that of the
10 filter being the object of the invention by 155.30% (in fact it takes up six divisions instead of two); this involves a "sigma" that is greater than that of the invention.

15 ·The filter being the object of the invention: has a range of greater probability of the "Q" with 59.694% in which the assumable values are included between 84.777 and 100.50. The most frequent "Q" is that of 99.08 and it advantageously falls into said range; the most
20 recurring error therefore is equal to -0.92%. The filter in Fig. 1c: has a range in which the "Q" has a maximum concentration of 40.561% and can take values included between 91.553 and 104.93 in which also the most frequent one that is equal to 104.84 is included.

·The object of the invention: has a "sigma" equal to 6.4699 that is advantageously lower by 51.764% than that of Sedra's filter; in addition the error of the real mean "Q" as compared with the ideal one is -1.642% instead of +2.897%. This means that in the invention not only the "Q" has a greater stability and is more reduced, but on an average it also takes a value that is more similar to the theoretical one; in fact, the whole range of the standard deviation taken by the filter in Fig. 1c is delimited by two "Q" values equal to 89.484 and 116.31, instead of 91.888 and 104.83, respectively, as it happens in the filter being the object of the present invention.

15 Conclusions

From the study on the "Q" dispersion it is possible to conclude that the filter of the diagram in Fig. 17(A) is much more performing than all other known filters of the same kind.

20

The present invention in fact, unlike the preceding ones, utilises processing of the parasitic voltages caused by the non-ideality of the operational amplifiers; these voltages are in inverse proportion to the open-loop dynamic gain, "A(S)" of the operational

25

amplifiers themselves. The final signal that is used to compensate for the parasitic poles is obtained from the amplification or the amplified sum of said voltages.

5 This processing alters the real transfer function of the filter, makes it virtually ideal and reduces sensitiveness of same towards the passive components.

In order to make the compensation effect more
10 efficient, it is necessary that all the operational amplifiers used to make the filter should be of same type and preferably coupled, i.e. belonging to a single integrated circuit; this is necessary because the devices originating from the same manufacturing process
15 have practically identical features that therefore enable a perfect phase counter-balancing in self-compensation processes, also under the most different environmental conditions.

20 In the light of the above, the great efficiency of the filter of the invention emerges. It is also to be pointed out that the in-line tuning of the frequency "fo" is simplified because it is sufficient to act on a single resistor; within limits it is even not necessary
25 to carry out said tuning since the compensation

techniques also contemplate an automatic restoration of the "fo" itself.

The invention achieves important advantages.

5

The filter in accordance with the invention is able to compensate for the non idealities introduced by the active elements present in the filter, in an optimal manner.

10

In particular, through the above described simple expedients in terms of circuits it is possible to compensate for the effects due to the parasitic poles in a very precise manner, irrespective of the number of
15 said poles and the number of the amplification-filtering stages used.

In other words, the above described compensation techniques enable the filter to obtain a behaviour
20 quite similar to the ideal theoretical one that is predictable a priori by means of standard mathematical calculations.

In addition, the above described expedients in terms of
25 circuits are very simple and cheap because generally

they are obtained by means of short circuits and single resistors or through a fourth operational amplifier with a useful output that in several cases would be at all events necessary even if the filter
5 were not compensated for in accordance with the techniques of the present invention.

In addition to the above, by virtue of the adopted compensation techniques the operational amplifiers used
10 in the different configurations are not destabilized at high frequency.